




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |    |  |
|--|----|--|
| (51) International Patent Classification <sup>6</sup> :<br>B29C 45/14, 45/33   | A1 | (11) International Publication Number: WO 98/18608<br>(43) International Publication Date: 7 May 1998 (07.05.98)   |
| (21) International Application Number: PCT/SE97/01594<br>(22) International Filing Date: 23 September 1997 (23.09.97)<br>(30) Priority Data:<br>MI96A002272 31 October 1996 (31.10.96) IT<br>(71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; Avenue Général-Guisan 70, CH-1009 Pully (CH).<br>(72) Inventors; and<br>(75) Inventors/Applicants (for US only): GUSTAFSSON, Per [SE/SE]; Villa Svanehill, Strandpromenaden, S-237 34 Bjärred (SE). RENDINA, Antonio [IT/IT]; Via Meucci, 2, I-41012 Carpi (IT).<br>(74) Agent: BENTZ, Christer; AB Tetra Pak, Ruben Rausing's gata, S-221 86 Lund (SE). |    | (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).<br><br>Published<br>With international search report. |

(54) Title: APPARATUS AND METHOD FOR MOULDING AN OPENING DEVICE ON A PACKAGING SHEET

## (57) Abstract

An apparatus and method for moulding opening devices (16) onto a packaging material sheet (4) at respective holes (32) provided in the sheet. The apparatus includes first and second mould tools (20, 22) arrangeable in a closed position so as to be in contact with opposite sides (24, 26) of the sheet and in an open position so as to be positioned distally from the sheet. In the closed positions a mould cavity (28) is formed between the first and second mould tools for accommodating a hole edge (30) in the sheet. The apparatus further includes an injection passage (36) for injecting heated thermoplastics material into the mould cavity, which injection passage extends in one of the mould tools such that the thermoplastics material is injected directly into the mould cavity at an injection point (38) of the mould cavity which is located distally from the hole edge, for providing effective formation of the opening device on the sheet. One of the mould tools includes a pair of half mould tools (22a, 22b) which are simultaneously moved from the open position to the closed position and vice versa such that the direction of movement of each of said half mould tools between the open and closed positions tangentially follows a circular path, for reducing wear of the mould tools. In the closed position of the mould tools, the sheet extends in a plane which is distally spaced from the plane of extension of the sheet in the open position aiding in release of the sheet and the moulded opening device from the mould tools.

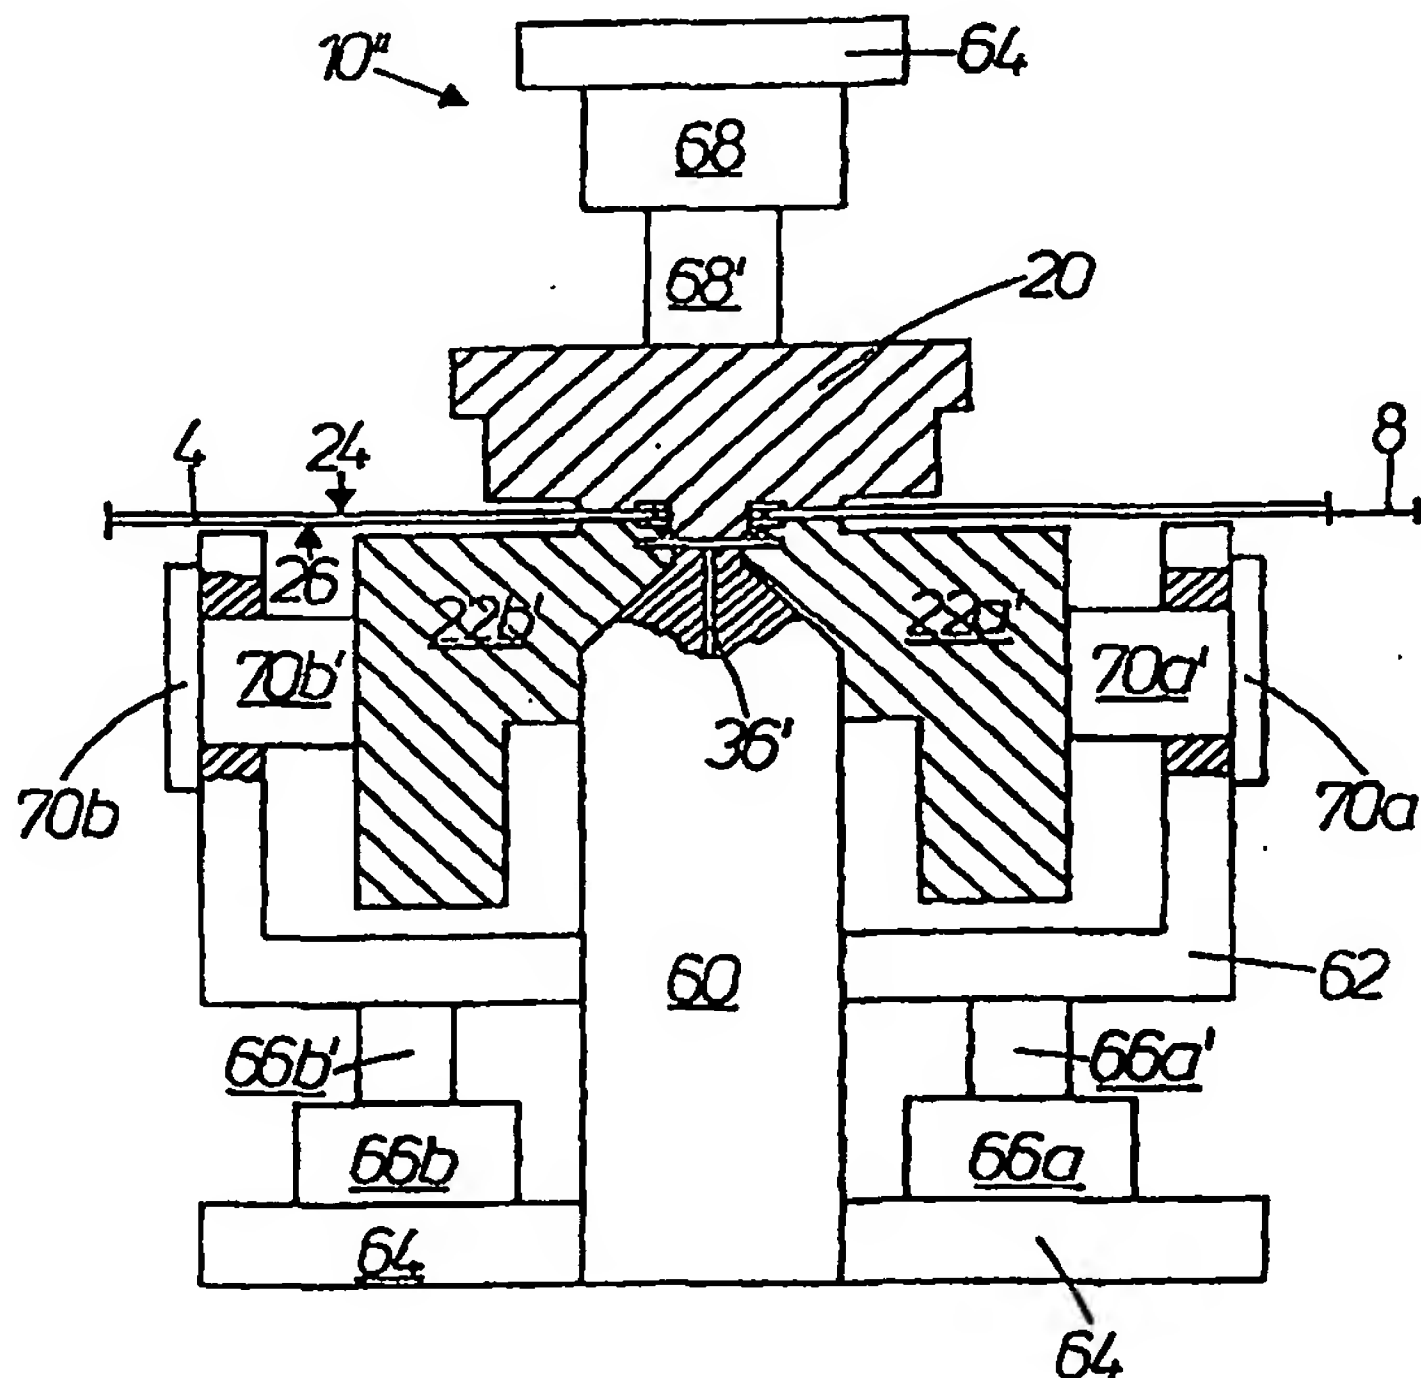

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakstan                                | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

# Apparatus and Method for Moulding An Opening Device on a Packaging Sheet

## Technical Field

The present invention relates to an apparatus and a method for direct injection moulding of a plastics material opening device to a hole provided on a sheet of packaging material. The term "opening device" as used herein, refers mainly to opening devices used for pouring liquid contents from a container, but also includes opening devices which may be used for filling a container.

## 10 Background Art

Opening devices of different types provided on a packaging container formed by packaging sheet material and adapted for containing substances such as foodstuffs, and in particular for containing liquid beverages such as juices, water, milk, wine, etc. are known.

15 One such opening device includes a perforation on a wall part of the packaging container and a plastics material lid device attached to the wall part and covering the perforation in a closed state. The lid device includes a circumferential base attached to the wall part, for example by means of adhesives, circumferentially surrounding the perforation, and a lid element  
20 hinged to the base. Once the lid element is opened, the perforation may be engaged and forced open so that the contents inside the packaging container may be dispensed therefrom.

Another known opening device includes an opening provided on a wall part of the packaging container and a plastics material lid device similar to the  
25 one described above attached to the wall part and covering the opening in a closed state. A sealing element such as an aluminium pull tab is connected to the wall part so as to cover the opening, and once the lid element has been opened, the sealing element may be removed to expose the opening for dispensing the contents of the packaging container.

30 Methods for providing the above opening devices on the packaging containers may include feeding a continuous web of packaging material to a first station at which the perforation or opening is provided on the web, and to a second station at which the lid element is attached to the web for covering the perforation or opening. The aluminium pull tab, if provided i.e. for covering

the opening, is attached in an intermediate step. After the opening devices are provided on the web, packaging containers from the web are formed, filled with product, and sealed, such that the opening devices are arranged on the finished container packagings for easy access.

5 One example of a machine for forming, filling, and sealing packaging containers is the TB8 filling machine, manufactured by Tetra Brik Packaging Systems of Modena, Italy.

As an alternative to the above opening devices, in which an already formed plastics material lid device is applied to the sheet, U.S. Patent No.  
10 4,725,213 (the disclosure of which is incorporated herein by reference) discloses a plastics material opening device which is injection moulded directly onto the sheet of packaging material. In particular, a pair of mould tools are moved into arrangement about a prestamped hole in the sheet, and heated thermoplastics material is injected through an injection passage  
15 defined between one of the mould tools and one surface of the sheet and extending along such surface of the sheet in order to form the opening device at the prestamped hole.

Although the method and apparatus for providing this latter type of opening device may be completely valid, there exists in the field of  
20 thermoplastics material injected opening devices the need for further improvements.

The injection passage in U.S. Patent No. 4,725,213 extends from the injector head for a significant distance along one surface of the sheet to one end of the mould cavity for forming the opening device, so as to create a  
25 number of disadvantageous effects. Since the injection passage enters the mould cavity at one end, the complete filling of the mould cavity with heated thermoplastics material is rendered difficult and inefficient particularly at the portion of the mould cavity arranged distally from the injection passage. Moreover, if the injection passage extending along one surface of the sheet is  
30 excessively long, the filling of the mould cavity is rendered even more difficult and inefficient, and therefore the apparatus and method are limited to moulding opening devices arranged substantially only near the edge of the sheet at which the injection head is positioned. Additionally, a strip of plastics material is formed in the injection passage, and further steps must be made to

eliminate such strip, which is additionally inefficient and which creates the possibility of damaging the opening device from which such strip must be removed. Further complications arise from subjecting the surface of the sheet of packaging material, which generally has a very low stiffness and resistance, to thermoplastics material at elevated pressures and temperatures injected into the injection passage.

The above described difficulties in completely filling the mould cavity may lead to a situation in which plastics material will not flow to all parts of the mould cavity and as a result, the edge of the opening may not be sufficiently sealed by plastics material of the opening device. Generally, the packaging sheet material is formed of several layers including an inner paper layer and two outer synthetic plastics material coating layers, one of which is destined to form a product contact surface. Other possible layers such as printing ink layers, laminating layers and aluminium foil layers may be interposed between the paper layer and the outer coating layers. When the opening in the packaging sheet material is stamped, the internal layers of the packaging sheet are exposed at the edge of the opening, and unless such edge is adequately sealed by the injected thermoplastics material opening device, the packaged product may come into contact with the internal layers of the packaging sheet material possibly causing damage thereto. Moreover, the overall efficiency of the apparatus and method is compromised when the time needed to inject the heated thermoplastics material for each mould operation is increased so as to assure an adequate filling of the mould cavity.

The mould tools in U.S. Patent No. 4,725,213 consist of a pair of mould tools which are both movable in opening and closing directions which extend perpendicularly to the extension of the sheet. Such a configuration substantially limits the flexibility of the device in forming opening devices with different shapes, since the mould tools must not encounter any portions of the opening device which protrude in a direction perpendicular to the direction of movement of the mould tools. The injection moulded opening device of U.S. Patent No. 4,725,213 indeed includes a pull tab which extends in a direction perpendicular to the sheet, for a long extension sufficient to be gripped by a user. Such an extensively protruding pull tab is disadvantageous with regard to storing and shipping packaging containers including an opening device of



this type.

It is furthermore desirous to have opening devices with base portions connected to the sheet hole and lid portions positioned in planes which are slightly raised with respect to the base portions and the packaging sheet.

- 5 These lid portions have an edge or lip which extends parallel to the extension of the packaging sheet, so that they may be gripped and opened by a user. The apparatus of U.S. Patent No. 4,725,213 is incapable of forming opening devices of this type due to the opening movement of the mould tools.

What is needed is an apparatus and method for injection moulding a  
10 thermoplastics material opening device onto a packaging material sheet which allows to assure that the opening device is moulded in a most effective and efficient manner possible.

#### Disclosure of the Invention

In accordance with one preferred aspect of the invention, there is  
15 provided in a packaging machine for forming package containers from a driven web of packaging sheet material, an opening device moulding station for moulding opening devices on to the web at respective holes provided in the web, which opening device moulding station includes first and second mould tools releasably arrangeable in closed positions so as to form a mould  
20 cavity for accommodating the hole edge of the web. An injection passage for injecting heated thermoplastics material into the mould cavity extends in at least one of the first and second mould tools such that the thermoplastics material is injected directly into the mould cavity at an injection point of the mould cavity which is located distally from the hole edge.

25 By having the injection point arranged distally from the hole edge, the heated thermoplastics material advantageously enters the mould cavity at a position which permits the filling of the mould cavity to be carried out in an effective and efficient manner. The heated plastics material will flow from the injection point smoothly and evenly initially distally from the hole edge and  
30 successively fill the mould cavity so that the heated plastics material makes contact with the hole edge at the end of the injection step. The times required for each injection step are therefore minimised in order to increase the efficiency of the opening device moulding operation.

According to a most preferred aspect of the invention, the injection point

is arranged at a lid forming portion of the mould cavity, in a substantially central position with respect to a base forming portion of the mould cavity, and the injection passage extends in one of the mould tools in a direction which is substantially perpendicular to the extension of the lid forming portion of the mould cavity. Such a configuration allows to fully maximise the efficiency of material flow from the injection point in a symmetrical and even manner initially distally from the hole edge and successively to fill the base forming portion of the mould cavity. Such configuration also allows to fully avoid subjecting surfaces of the web to the flow of heated thermoplastics material.

10 In accordance with another preferred aspect of the invention, there is provided an opening device moulding apparatus for moulding plastics material opening devices on to a sheet at respective holes provided in the sheet, which opening device moulding apparatus includes first and second mould tools releasably arrangeable in closed positions so as to form a mould  
15 cavity for accommodating the hole edge of the sheet, a drive mechanism for selectively moving the first mould tool and said second mould tool between the open and closed positions, and at least one of the first and second mould tools includes a pair of half mould tools. The drive mechanism includes a supporting structure for supporting the half mould tools such that in the open  
20 position the half mould tools are mutually spaced from each other in an extension plane extending substantially parallel to the plane of extension of the sheet and such that in the closed position the half mould tools are mutually arranged in contact with each other. The drive mechanism further includes a driver for moving the half mould tools simultaneously from the open position to  
25 the closed position and vice versa such that the direction of movement of each of the half mould tools between the open and closed positions comprises a directional component extending parallel to the sheet extension plane and a directional component extending perpendicularly to the sheet extension plane.

With such a configuration of the drive mechanism, it is advantageously  
30 possible to effectively directly mould opening devices of many various shapes which may include, in particular, portions which protrude and extend in a plane which is parallel to the extension plane of the sheet. Moreover, the particular configuration of the drive mechanism is such that the half mould tools mutually arrive and make contact together at the closed position with a

delicate approach so as to provide for minimum wear of the half mould tools. According to a most preferred embodiment, the drive mechanism is configured such that the direction of movement of each of the half mould tools between the open and closed positions tangentially follows a circular path, thereby for  
5 minimising the space requirements of the opening device moulding apparatus and for minimising wear on the half mould tools.

In accordance with yet another aspect of the invention, there is provided an opening device moulding apparatus for injection moulding plastics material opening devices at holes in a packaging material sheet, including first and  
10 second mould tools arrangeable in open and closed positions respectively spaced apart from and engaging the sheet, wherein in the closed position the sheet extends in a plane which is distally spaced from the plane of extension of the sheet in the open position. When the sheet is spaced from its normal extension by the mould tools in the closed position, it is put under an added  
15 tension which advantageously facilitates the release of the sheet and moulded opening device from the mould tools as such mould tools move away from the closed position to the open position.

The technical characteristics and advantages of the present invention will become apparent to those skilled in the art from the following detailed  
20 description of some preferred embodiments thereof, described and illustrated in the accompanying drawings only by way of non-limitative example, wherein like reference numerals indicate like parts.

#### Brief Description of Drawings

Fig. 1 is a schematic view showing feeding of a web of packaging sheet  
25 material in a packing machine including an opening device moulding station in accordance with one preferred aspect of the invention;

Fig. 2 is a perspective view of the lower portion of an opening device moulding station in a first preferred embodiment of the invention;

Fig. 3 is a partially sectional side elevation view of the opening device  
30 moulding station of Fig 2 in which the mould tools are in an open position;

Fig. 4 is a partially sectional side elevation view of the opening device of Fig. 3 in which the mould tools are in a closed position;

Fig. 4a is an enlarged sectional detail view of the web disposed between the mould tools of Fig. 4 in the closed position forming a mould cavity



ready for heated thermoplastics injection moulding;

Fig. 5 is a partially sectional side elevation view of an opening device moulding station in a second preferred embodiment of the invention, in which the mould tools are in an open position;

5 Fig. 6 is a partially sectional side elevation view of the opening device of Fig. 5 in which the mould tools are in a closed position; and

Fig. 6a is an enlarged sectional detail view of the web disposed between the mould tools of Fig. 6 in the closed position forming a mould cavity ready for heated thermoplastics injection moulding.

#### 10 Best Modes for Carrying Out the Invention

With initial reference to Fig. 1, there is shown an apparatus 2 according to the invention, and the reference numeral 18 indicates a packaging machine for forming package containers from a packaging sheet material web 4. It will be understood that the apparatus 2 may be either incorporated in the  
15 packaging machine or filling machine 18, or located upstream of such machine. Web 4 is fed through packaging machine 2 by means of an appropriate drive 6a-e in a feed direction 8. Drive 6a-e is adapted for intermittently feeding web 4 at an intermittent feed section 2a of machine 2, and for continuously feeding web 4 at a continuous infeed section 2b and a  
20 continuous outfeed section 2c, arranged respectively upstream and downstream of the intermittent feed section 2a with respect to web feed direction 8.

At intermittent feed section 2a, there are arranged a hole punching station 10 for punching holes in web 4, and an opening device moulding  
25 station 12 for injection moulding thermoplastics material opening devices at the holes provided on web 4. Drive 6a-e is adapted for intermittently feeding web 4 through hole punching station 10 such that web 4 is appropriately stopped and correctly positioned at hole punching station 10 for a time sufficient to punch the holes in web 4, and drive 6a-e is also adapted for  
30 intermittently feeding web 4 through opening device moulding station 10 such that the holes in web 4 are appropriately stopped and correctly positioned at opening device moulding station 10 for a time sufficient to mould opening devices at the holes punched previously at hole punching station 10.

Drive 6a-e includes continuous feed rollers 6b and 6c arranged

respectively at continuous infeed section 2b for unwinding and feeding web 4 from a reel 14 of packaging material web, and at continuous outfeed section 2c for continuously feeding web 4 with opening devices 16 moulded thereon to a container forming station 18 for forming and sealing containers from web 4 and filling the containers with product.

Drive 6a-e further includes at intermittent feed section 2a intermittent feed rollers 6a, tensioning rollers 6d, and an idler roller 6e which together mutually cooperate so as to maintain the tension of web 4 at intermittent feed section 2a substantially constant in a stopped position, so that the hole punching and opening device moulding operations may be carried out with sufficient precision. Moreover, the particular arrangement of drive 6a-e forms an infeed buffer magazine 20 and an outfeed buffer magazine 22. Infeed buffer magazine 20 includes a changing infeed web length 4b which extends between tensioning rollers 6d and continuous feed rollers 6b and which moves vertically along direction 20' such that infeed web length 4b changes in size (as indicated by dashed lines in Fig.1) to appropriately compensate for the interface between intermittent feed section 2a and continuous infeed section 2b. Similarly, outfeed buffer magazine 22 includes a changing outfeed web length 4c which extends between intermittent drive rollers 6a and continuous feed rollers 6c and which moves vertically in direction 22' such that outfeed web length 4c changes in size (as indicated by dashed lines in Fig.1) to appropriately compensate for the interface between intermittent feed section 2a and continuous outfeed section 2c. In this manner the feeding of web 4 is continuous at roll 14 and container forming station 18 while the feeding of web 4 is intermittent at hole punching station 10 and opening device moulding station 12.

In Fig. 1, three hole punching stations 10 and three opening device moulding stations 12 are shown, such that three holes are formed in web 4 and three opening devices are moulded in web 4 for each intermittent stopped position of web 4. The particular number of hole punching stations 10 and opening device moulding stations 12 may vary according to the requirements. Moreover, hole punching stations 10 and opening device moulding stations 12 may move relative to one another respectively in directions 10a and 12a along the extension of feeding of web 4, so that the holes and opening devices

provided on web may be relatively spaced in different positions to allow to form packaging containers of different sizes.

Apparatus and methods for feeding web 4, for punching holes in web 4, and for forming and sealing containers from web 4 and filling the containers  
5 with product, in the manner as described above, are known, and for example are included in the TBA/19-System manufactured by Tetra Brik of Modena, Italy.

Opening device moulding station 10 positioned in combination with packaging machine 2 advantageously provides an efficient and effective  
10 means for continuously moulding an opening device on a web fed from a roll and for successively forming, sealing, and filling a packaging container in the same compact line and continuous method. The adhesion of separately formed and supplied opening devices to the web, as is carried out in conventional apparatus, is eliminated, thereby to provide savings in time and  
15 cost related to the separate production, storage, and transport of the separately formed opening devices. While opening device moulding station 10 is particularly advantageous for these reasons, it is envisaged that opening device moulding station 10 may operate in many different manners, for example to mould opening devices on a fed web which is then rolled into a  
20 web reel for later use, or for example to mould opening devices on any type and shape of packaging sheet material such as packaging material blanks or protruding packaging material flaps to mention only a few. Moreover, packaging machine 2 may be provided in an alternative form, such that web reel 14 is already provided with prestamped holes so as to allow to eliminate  
25 hole punch station 10, and/or such that the entire drive of web 4 is performed intermittently. Additionally, container forming station 18 may be any one of a number of forming stations used to form and seal packages of different sizes and shapes and to fill different products into the formed packages.

Figs. 2-4a show a first preferred embodiment of opening device  
30 moulding station 10'. Opening device moulding station 10' includes a first mould tool 20 and a second mould tool 22 which are arrangeable relative to web 4 in closed positions so as to be in contact respectively with a first side 24 of web 4 and a second side 26 of web 4 (Figs. 4 and 4a), when web 4 is in a stopped position at opening device moulding station 10'. First mould tool 20

and second mould tool 22 are also arrangeable relative to web 4 in open positions so as to be positioned distally respectively from first web side 24 and second web side 26 (Fig. 3), so as to allow the intermittent feeding of web 4 in feed direction 8.

5 In the particular embodiment shown, first mould tool 20 includes a single inner mould tool 20 which in operates in a fixed position, and second mould tool 22 includes a pair of half outer mould tools 22a and 22b which are driven between the open and closed positions relative to one another, and relative to web 4 and to inner mould tool 20, by a drive mechanism which is  
10 described hereinafter. Inner mould tool 20 is arranged for contact with web first side 24 destined to form an inner side of the packaging container formed with web 4, while outer mould tools 22a and 22b are arranged for contact with web second side 26 destined to form an outer side of the packaging container formed with web 4.

15 With particular reference to Fig. 4a, in the closed moulding positions of inner mould tool 20 and half outer mould tools 22a and 22b, a mould cavity 28 is formed between inner mould tool 20 and half outer mould tools 22a and 22b in which a hole edge 30, of a hole 32 in web 4 correctly positioned at opening device moulding station 10', is accommodated.

20 Mould cavity 28 includes in the embodiment shown a portion 28a for forming a lid portion of the opening device 16, a portion 28b for forming a base portion of opening device 16 for connection to web 4, and a connecting portion 28c for forming a reduced thickness tearing edge of opening device 16 for aiding in releasing the lid portion from the base portion. The present  
25 disclosure relates more in particular to the manner in which opening device is moulded to web 4 at hole edge 30 thereof, while opening device 16 may assume any number of different overall shapes.

In the embodiment shown, hole edge 30 is circumferential to completely enclose the hole in web 4, and preferably the entire hole edge 30 is arranged  
30 inside base forming portion 28a of mould cavity 28 prior to injection, while base forming portion 28b is also circumferential and has a dimension sufficient to completely enclose hole edge 30. Preferably, hole edge 30, base forming portion 28b, and connecting portion 28c are ovular ring-shaped in a longitudinal cross section extending substantially parallel to the extension of



web 4, and lid forming portion 28a is ovular disc-shaped in a longitudinal cross section extending substantially parallel to the extension of web 4. Moreover, in the closed moulding position a gap 34 is formed between upper and lower mould tools 20 and 22 which preferably has a width dimension  
5 smaller than the thickness of packaging web material 4 thereby to compress web 4 inside gap 34 and form a seal sufficient to prevent any significant leakage of the heated thermoplastics material outside of mould cavity 28.

Opening device moulding station 10' further includes an injection passage 36 for injecting heated thermoplastics material into mould cavity 28.  
10 Injection of heated thermoplastics material through injection passage 36 may be carried out using any conventional method and apparatus known and available to a skilled person in the art.

Injection passage 36 extends in fixed inner mould tool 20 in the particular embodiment shown, and in accordance with a preferred aspect of  
15 the invention, injection passage 36 is configured such that thermoplastics material is injected directly into mould cavity 28 at an injection point 38 of mould cavity 28 which is located distally from hole edge 30.

By having injection point 38 arranged distally from hole edge 30, the heated thermoplastics material advantageously enters the mould cavity at a  
20 position which permits the filling of the mould cavity to be carried out in an effective and efficient manner. The heated plastics material will flow from injection point 38 smoothly and evenly initially distally from hole edge 30 and successively to fill base forming portion 28b of mould cavity 28 so that the heated plastics material makes contact with hole edge 30 at the end of the  
25 injection step. The times required for each injection step are minimised in order to increase the efficiency of the opening device moulding operation.

Injection point 38 in the particular embodiment is arranged at lid forming portion 28a of mould cavity 28, in a substantially central position with respect to base forming portion 28b. Such an arrangement allows to fully maximise  
30 the efficiency of material flow from injection point 38 symmetrically and evenly initially distally from hole edge 30 and successively to fill base forming portion 28b of mould cavity 28.

Moreover, injection passage 36 extends in inner mould tool 20 in a direction which is substantially perpendicular to the extension of lid forming

portion 28c of mould cavity 28 so as to fully avoid subjecting surfaces of web 4 to the flow of heated thermoplastics material.

Inner mould tool 20 and half outer mould tools 22a and 22b are driven between the open and closed positions relative to one another, and relative to web 4 and to inner mould tool 20, by a drive mechanism 40. Drive mechanism 40 is coordinated with drive 6a-e for feeding web 4, with hole punching station, and with the injection of heated thermoplastics material through injection passage 36, so as to provide a continuous production of moulded opening devices 16 on web 4.

Drive mechanism 40 includes a supporting structure 42 for supporting half outer mould tools 22a and 22b such that in the open position half outer mould tools 22a and 22b are mutually spaced from each other in an extension plane extending substantially parallel to the plane of extension of web 4 (Fig. 3) and such that in the closed position half outer mould tools 22a and 22b are mutually arranged in contact with each other and with second web side 26 (Figs. 4-4a). Drive mechanism 40 also includes a driver 44 for moving half outer mould tools 22a and 22b from the open position to the closed position and vice versa such that the direction of movement of each of half outer mould tools between the open and closed positions includes a directional component extending parallel to the extension plane of web 4 and a directional component extending perpendicularly to the extension plane of web 4.

The particular configuration of drive mechanism 40 which moves half outer mould tools 22a and 22b in such directions as they move between the open and closed positions advantageously allow to effectively form opening devices of many various shapes which may include in particular portions which protrude and extend in a plane which is parallel to the extension plane of web 4.

Moreover, the particular configuration of drive mechanism 40 is such that outer half mould tools 22a and 22b mutually arrive and make contact together at the closed position with a delicate approach since the movement of each of outer half mould tools 22a and 22b may include a direction component parallel to the extension plane of web 4 which is minimised while still achieving mutual contact in the closed position. Such a delicate approach of outer half mould tools 22a and 22b advantageously provides for minimum

wear of outer half mould tools 22a and 22b.

In a most preferred embodiment such as that shown in Figs. 2-4, drive mechanism 40 is configured such that the direction of movement of each of outer half mould tools 22a and 22b between the open and closed positions tangentially follows a circular path. In this manner, the direction movement component parallel to the extension plane of web 4 of outer half mould tools 22a and 22b at the approach and release phases most near the closed position may be minimised virtually to zero while such direction movement component parallel to the extension plane of web 4 in phases away from the closed position may be rapidly increased, so as to minimise the space requirements of opening device moulding station 10' and so as to minimise wear on outer half mould tools 22a and 22b, while still maintaining flexibility with regard to forming opening devices of different shapes.

Supporting structure 42 includes a fixed support frame having a horizontal base 46 and arm pairs 48a-c extending vertically upward from base 42. Supporting structure further includes lever pairs 50 and 52 freely pivoted respectively between lateral arm pairs 48a and 48c and outer half mould tools 22a and 22b about pivot axes which extend substantially parallel to the plane of extension of web 4.

Supporting structure 42 further includes a horizontal slide plate 54 having slots 54a in which bolts 54b connected to each of outer half mould tools 22a and 22b are slidably accommodated. Slots 54a extend in slide plate 54 such that each of outer half mould tools 22a and 22b are slidably supported on slide plate 54 in a linear direction extending parallel to web feed direction 8.

Driver 44 includes a fluid-actuated cylinder 55 having a stem slidably extending through fixed base 46 and connected to slide plate 54 for reciprocatingly moving slide plate 54 in a vertical direction extending perpendicularly to the extension of web 4.

This particular configuration of drive mechanism 40 causes outer half mould tools 22a and 22b to move between the open and closed positions along a circular path centred about the pivot axes respectively of lever pairs 50 and 52 and lateral arms 48a and 48c.

The dimensions of outer half mould tools 22a and 22b, of lateral arms

48a and 48c, and of lever pairs 50 and 52 are such that when outer half mould tools 22a and 22b are arranged in contact in the closed position, a contact force between the mating surfaces of outer half mould tools 22a and 22b is created sufficient to provide an adequate seal of mould cavity 28 such that  
5 heated thermoplastics material will not leak excessively out of mould cavity 28 at the location of the mating surfaces of outer half moulds 22a and 22b. According to a further aspect of the invention, there is provided an adjustable biasing device for adjustably setting the contact force between outer half moulds 22a and 22b in the closed position.

10 For this purpose, lateral arms 48a and 48c are provided with through gaps 56 which make lateral arms 48a and 48c relatively flexible in a direction parallel to web feed direction 8, and a pair of tension rods 58 are interconnected between lateral arms 48a and 48c. Tension rods 58 are freely slidably disposed in central arms 48b, and adjustment nuts 58a are adjustably  
15 screwed at the ends of tension rods 58.

Fig. 4 illustrates the outward flexure of lateral arms 48a and 48c when outer half mould tools 22a and 22b are in the closed mating position, and adjustment of nuts 58a will properly select the desired contact force between half mould tools 22a and 22b in the closed position.

20 The configuration of supporting structure 42 is such that in the closed position of outer half mould tools 22a and 22b (Fig. 4), the portion of web 4 which is in contact with outer half mould tools 22a and 22b extends in a plane which is distally spaced from the normal plane of extension of web 4 in the open position of outer half mould tools 22a and 22b (Fig. 3). In this manner,  
25 web 4 in the spaced position from its normal extension is put under an added tension which advantageously facilitates the release of web 4 and moulded opening device 16 from mould tools 20 and 22 as such mould tools 20 and 22 move away from the closed position to the open position.

Figs. 5-6a show a second preferred embodiment of opening device  
30 moulding station 10". Opening device moulding station 10" includes a first mould tool 20' and a second mould tool 22' which are arrangeable relative to web 4 in closed positions so as to be in contact respectively with a first side 24 of web 4 and a second side 26 of web 4 (Figs. 6 and 6a), when web 4 is in a stopped position at opening device moulding station 10". First mould tool 20'



and second mould tool 22' are also arrangeable relative to web 4 in open positions so as to be positioned distally respectively from first web side 24 and second web side 26 (Fig. 5), so as to allow the intermittent feeding of web 4 in feed direction 8. First mould tool 20' includes a single inner mould tool 20' movable in a vertical direction, and second mould tool 22' includes a pair of lateral outer mould tools 22a' and 22b' each movable in the vertical and a horizontal direction. Inner mould tool 20' and lateral outer mould tools 22a' and 22b' are driven between the open and closed positions relative to one another, and relative to web 4, by a drive mechanism which is described hereinafter.

With reference to Fig. 6a, in the closed moulding positions of inner mould tool 20' and lateral outer mould tools 22a' and 22b', a mould cavity 28' is formed between inner mould tool 20' and lateral outer mould tools 22a and 22b in which hole edge 30 of hole 32 in web 4 correctly positioned at opening device moulding station 10" is accommodated. Mould cavity 28' includes a portion 28a' for forming a lid portion of the opening device 16, a portion 28b' for forming a base portion of opening device 16 for connection to web 4, and a connecting portion 28c' for forming a reduced thickness tearing edge of opening device 16 for aiding in releasing the lid portion from the base portion.

The entire hole edge 30 is preferably arranged inside base forming portion 28a' prior to injection, while base forming portion 28b' is circumferential and has a dimension sufficient to completely enclose hole edge 30. Preferably, base forming portion 28b' and connecting portion 28c' are ovular ring-shaped in a longitudinal cross section extending substantially parallel to the extension of web 4, and lid forming portion 28a' is ovular disc-shaped in a longitudinal cross section extending substantially parallel to the extension of web 4. Moreover, in the closed moulding position a gap 34' is formed between upper and lower mould tools 20' and 22' which preferably has a width dimension smaller than the thickness of packaging web material 4 thereby to compress web 4 inside gap 34' and form a seal sufficient to prevent any significant leakage of the heated thermoplastics material outside of mould cavity 28'.

Opening device moulding station 10" further includes an injection passage 36' for injecting heated thermoplastics material into mould cavity 28'.

Injection passage 36' extends in a fixed injection head 60 which has an upper end portion 60a forming part of second mould tool 22', as seen in Fig. 6a. Accordingly lateral outer mould tools 22a' and 22b' are movably arrangeable with respect to fixed upper end portion 60a in the closed moulding position,  
5 forming mould cavity 28'.

Injection passage 36' is configured such that thermoplastics material is injected directly into mould cavity 28' at an injection point 38' of mould cavity 28' which is located distally from hole edge 30, thereby to achieve the advantageous effects as obtained by the above described first embodiment of  
10 opening device moulding station 10'. Injection passage 36' moreover extends in outer mould tool 22' in a direction which is substantially perpendicular to the extension of lid forming portion 28c' of mould cavity 28', distally from surfaces of web 4.

The drive mechanism for driving inner mould tool 20' and lateral outer  
15 mould tools 22a' and 22b' are between the open and closed positions includes a movable support frame 62 arranged circumferentially about fixed injection head 60 and movable in a vertical direction, and a fixed support frame 64 supporting fluid- activated cylinders 66a-b and 68 having stems 66a'-b' and 68' connected respectively to movable support frame 62 and inner  
20 mould tool 20' for reciprocatingly moving these elements in the vertical direction. The drive mechanism further includes fluid-activated cylinders 70a and 70b having stems 70a' and 70b' connected respectively to lateral outer mould tools 22a' and 22b' for reciprocatingly moving these elements in the horizontal direction.

25 The actuation of cylinders 66a-b, 68, and 70a-b is coordinated with drive 6a-e for feeding web 4, with hole punching station 10, and with the injection of heated thermoplastics material through injection passage 36', so as to provide a continuous production of moulded opening devices 16 on web 4.

Claims

1. An opening device moulding apparatus for injection moulding plastics material opening devices at holes in a packaging material sheet, comprising:
- 5 at least one first mould tool arrangeable in a closed position so as to be in contact with a first side of the sheet positioned at said opening device moulding station and arrangeable in an open position so as to be positioned distally from the first side of the sheet positioned at said opening device moulding station;
- 10 at least one second mould tool arrangeable in a closed position so as to be in contact with a second side of the sheet positioned at said opening device moulding station and arrangeable in an open position so as to be positioned distally from the second side of the sheet positioned at said opening device moulding station;
- 15 wherein in the closed positions of said first and second mould tools a mould cavity is formed between said first and second mould tools for at least partially accommodating a hole edge in the sheet positioned at said opening device moulding station; and
- an injection passage for injecting heated thermoplastics material into
- 20 said mould cavity, wherein said injection passage extends in at least one of said first and second mould tools such that the thermoplastics material is injected directly into the mould cavity at an injection point of the mould cavity which is located distally from said hole edge accommodated in said mould cavity.
- 25 2. The apparatus of claim 1 wherein said mould cavity has a base portion for accommodating said hole edge in the closed positions of said first and second mould tools and for forming a base of a moulded opening device, and a lid portion for forming a lid of the moulded opening device.
3. The apparatus of claim 1 wherein said injection point of the
- 30 mould cavity is arranged at said lid portion in a substantially central position with respect to said base portion.
4. The apparatus of claim 3 wherein said injection channel extends substantially perpendicularly to the extension of said lid portion of said mould cavity.

5. The apparatus of claim 1 further comprising a drive mechanism for selectively moving said first mould tool and said second mould tool between said open and closed positions, at least one of said first and second mould tools comprising a pair of half mould tools, wherein said drive  
5 mechanism comprises:

a supporting structure for supporting said half mould tools such that in the open position said half mould tools are mutually spaced from each other in an extension plane extending substantially parallel to the plane of extension of the sheet and such that in the closed position said half mould tools are  
10 mutually arranged in contact with each other and with said second sheet side; and

a driver for moving said half mould tools simultaneously from the open position to the closed position and vice versa such that the direction of movement of each of said half mould tools between said open and closed  
15 positions comprises a directional component extending parallel to said extension plane and a directional component extending perpendicularly to said extension plane.

6. The apparatus of claim 5 wherein said drive mechanism is configured such that the direction of movement of each of said half mould tools  
20 between said open and closed positions tangentially follows a circular path.

7. The apparatus of claim 5 wherein in said closed position said sheet extends in a plane which is distally spaced from the plane of extension of said sheet in said open position.

8. The apparatus of claim 5 further comprising an adjustable  
25 biasing device for adjustably setting a contact force between said half mould tools in said closed position.

9. A method for direct injection moulding of a plastics material opening device to a hole which is disposed in a sheet of packaging material and which has a hole edge, comprising the steps of:

30 arranging at least one first mould tool in contact with a first side of the packaging sheet material and arranging at least one second mould tool in contact with a second side of the packaging sheet material and thereby forming a mould cavity defined between said first and second mould tools in a manner such that at least a portion of said hole edge is arranged inside said



mould cavity; and

injecting plastics material into said mould cavity so as to form the plastics material opening device wherein the plastics material is injected directly into the mould cavity at an injection point of the mould cavity which is  
5 located distally from said portion of the hole edge.

10. The method of claim 9 including arranging the first and second mould tools so as to form a mould cavity having a base portion for forming a base of the opening device and a lid portion for forming a lid of the opening device in a manner such that all of said hole edge is arranged inside said  
10 base portion of said mould cavity.

11. The method of claim 10 including injecting plastics material at an injection point arranged at the lid portion of the mould cavity in a substantially central position with respect to said hole edge.

12. The method of claim 11 including injecting plastics material  
15 through a injection channel which is disposed in one of said first and second mould tools and which extends substantially perpendicularly to the extension of said lid portion of said mould cavity.

13. A plastics material opening device obtained by a method for direct injection moulding of a plastics material opening device as defined in  
20 one or more of claims 9-12.

14. A package for pourable food products, comprising a plastics material opening device obtained by the method as defined in one or more of claims 9-12.

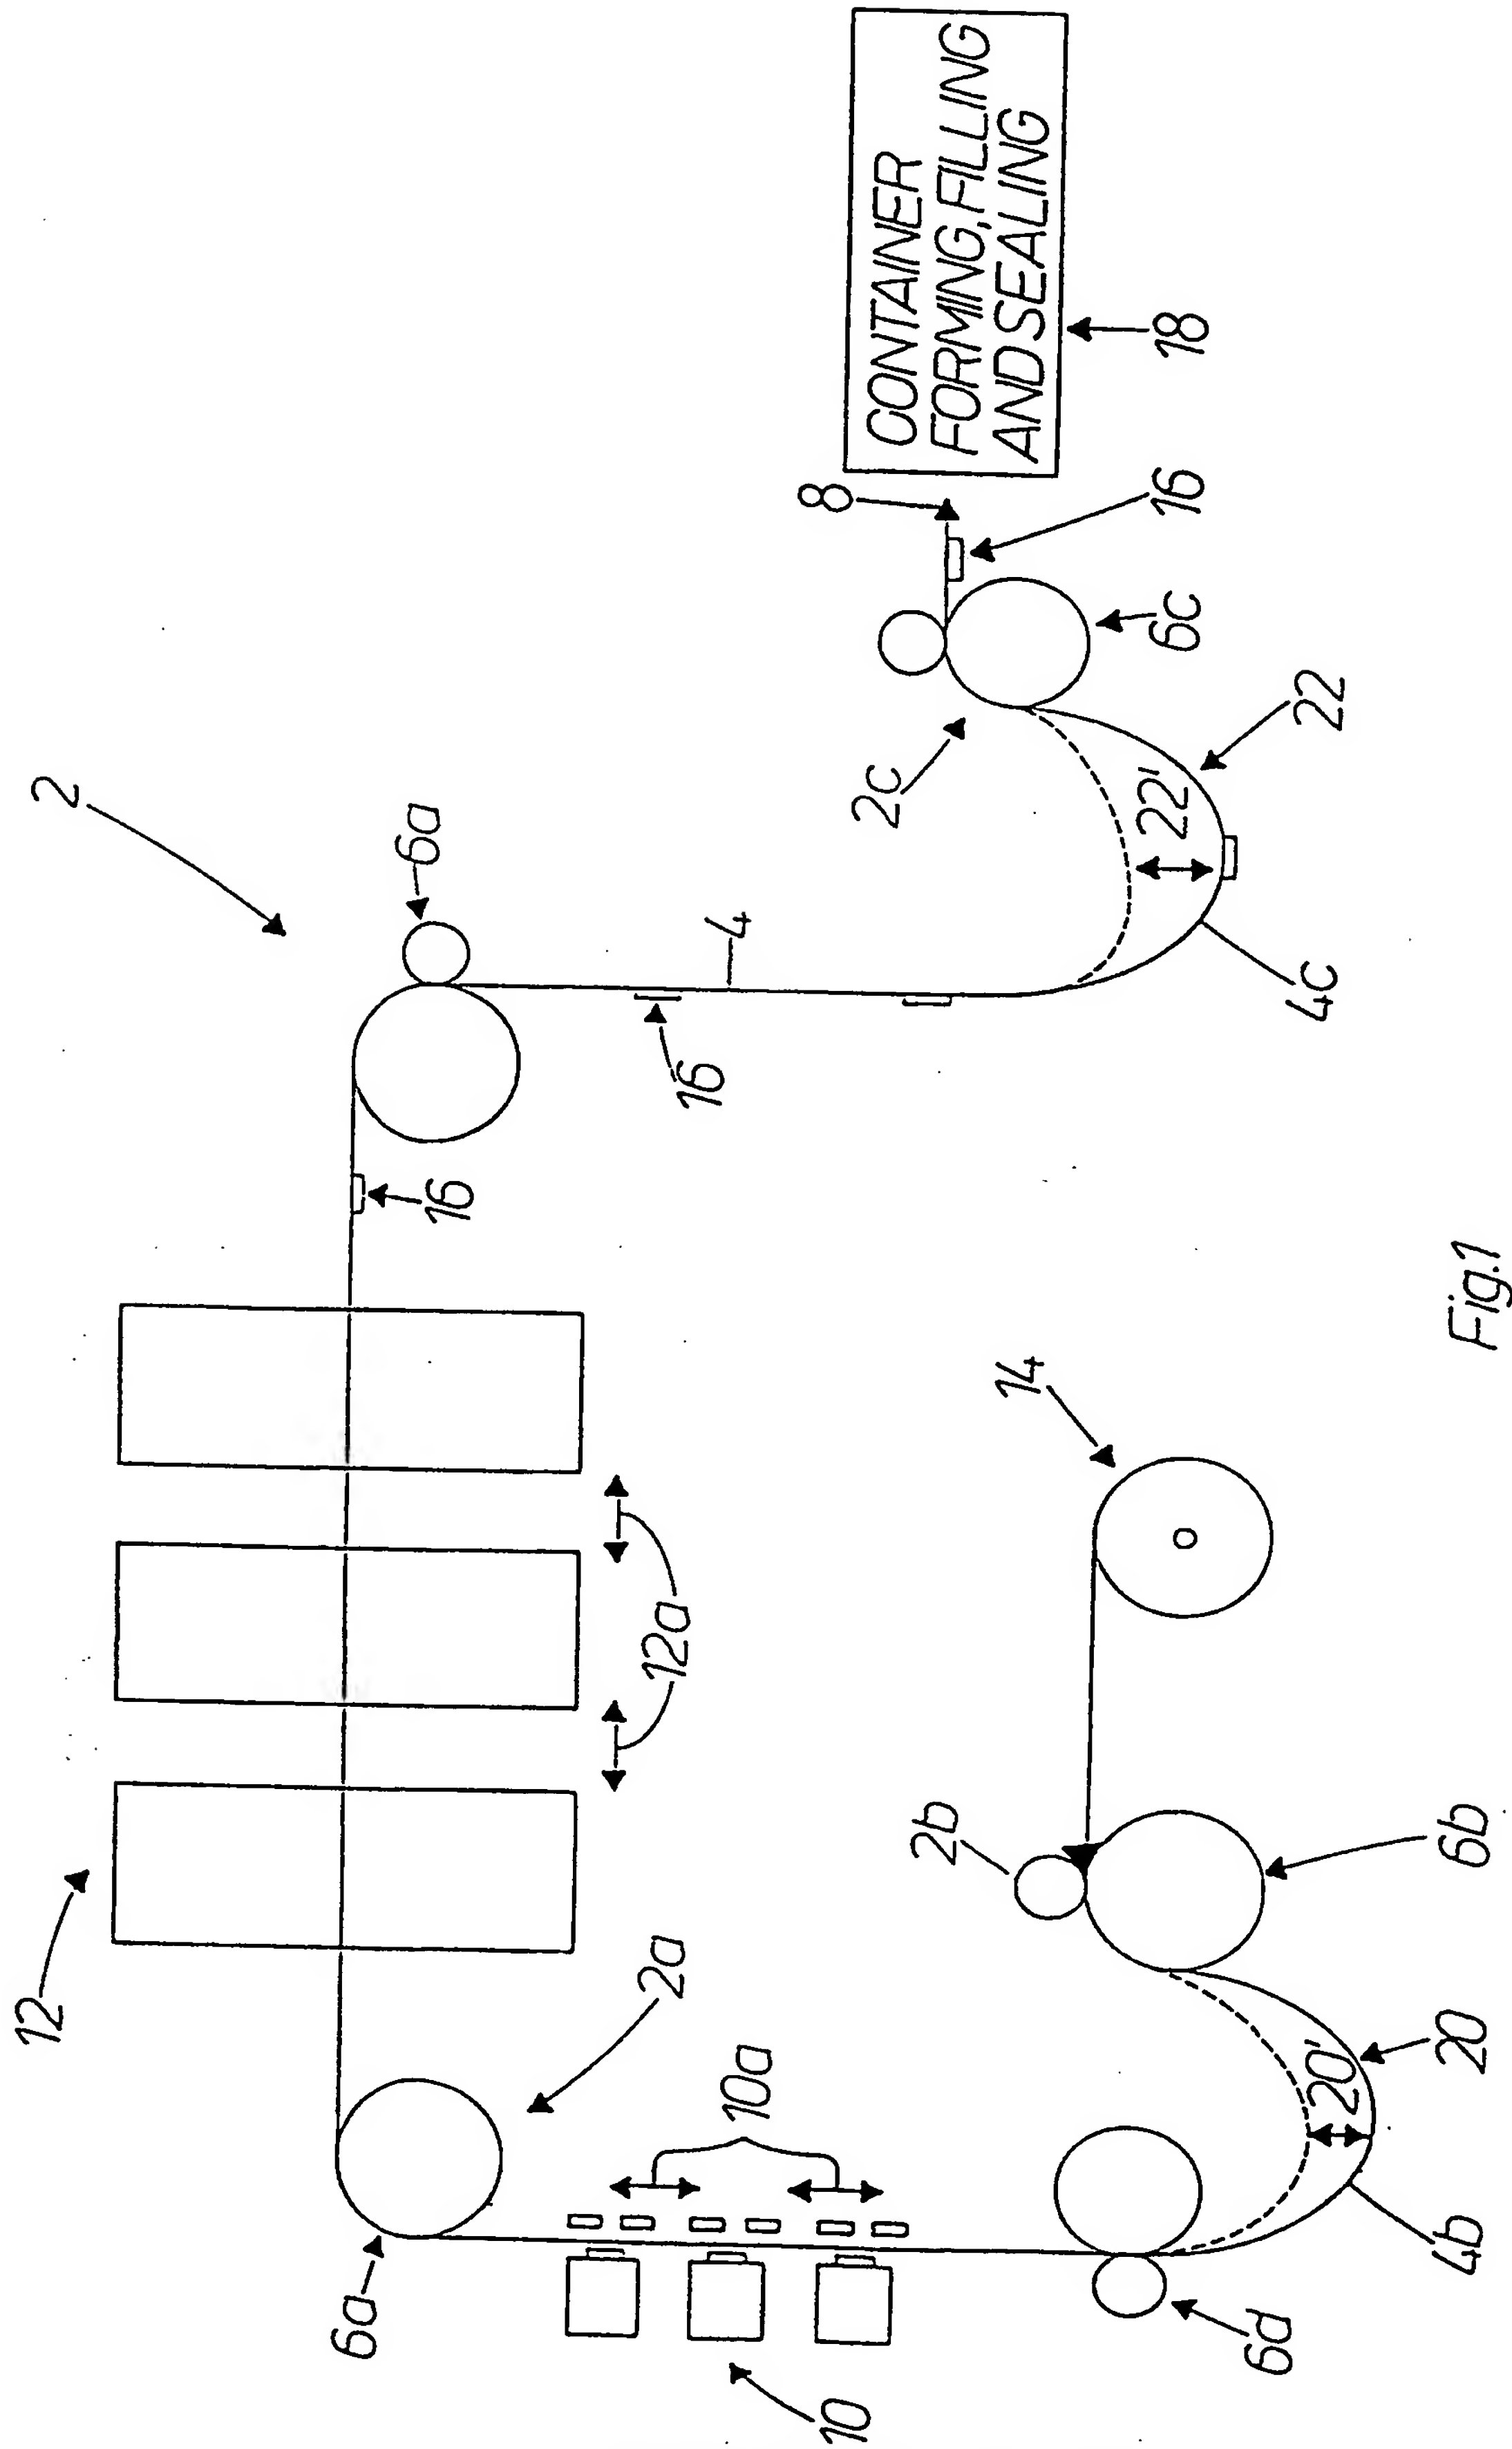
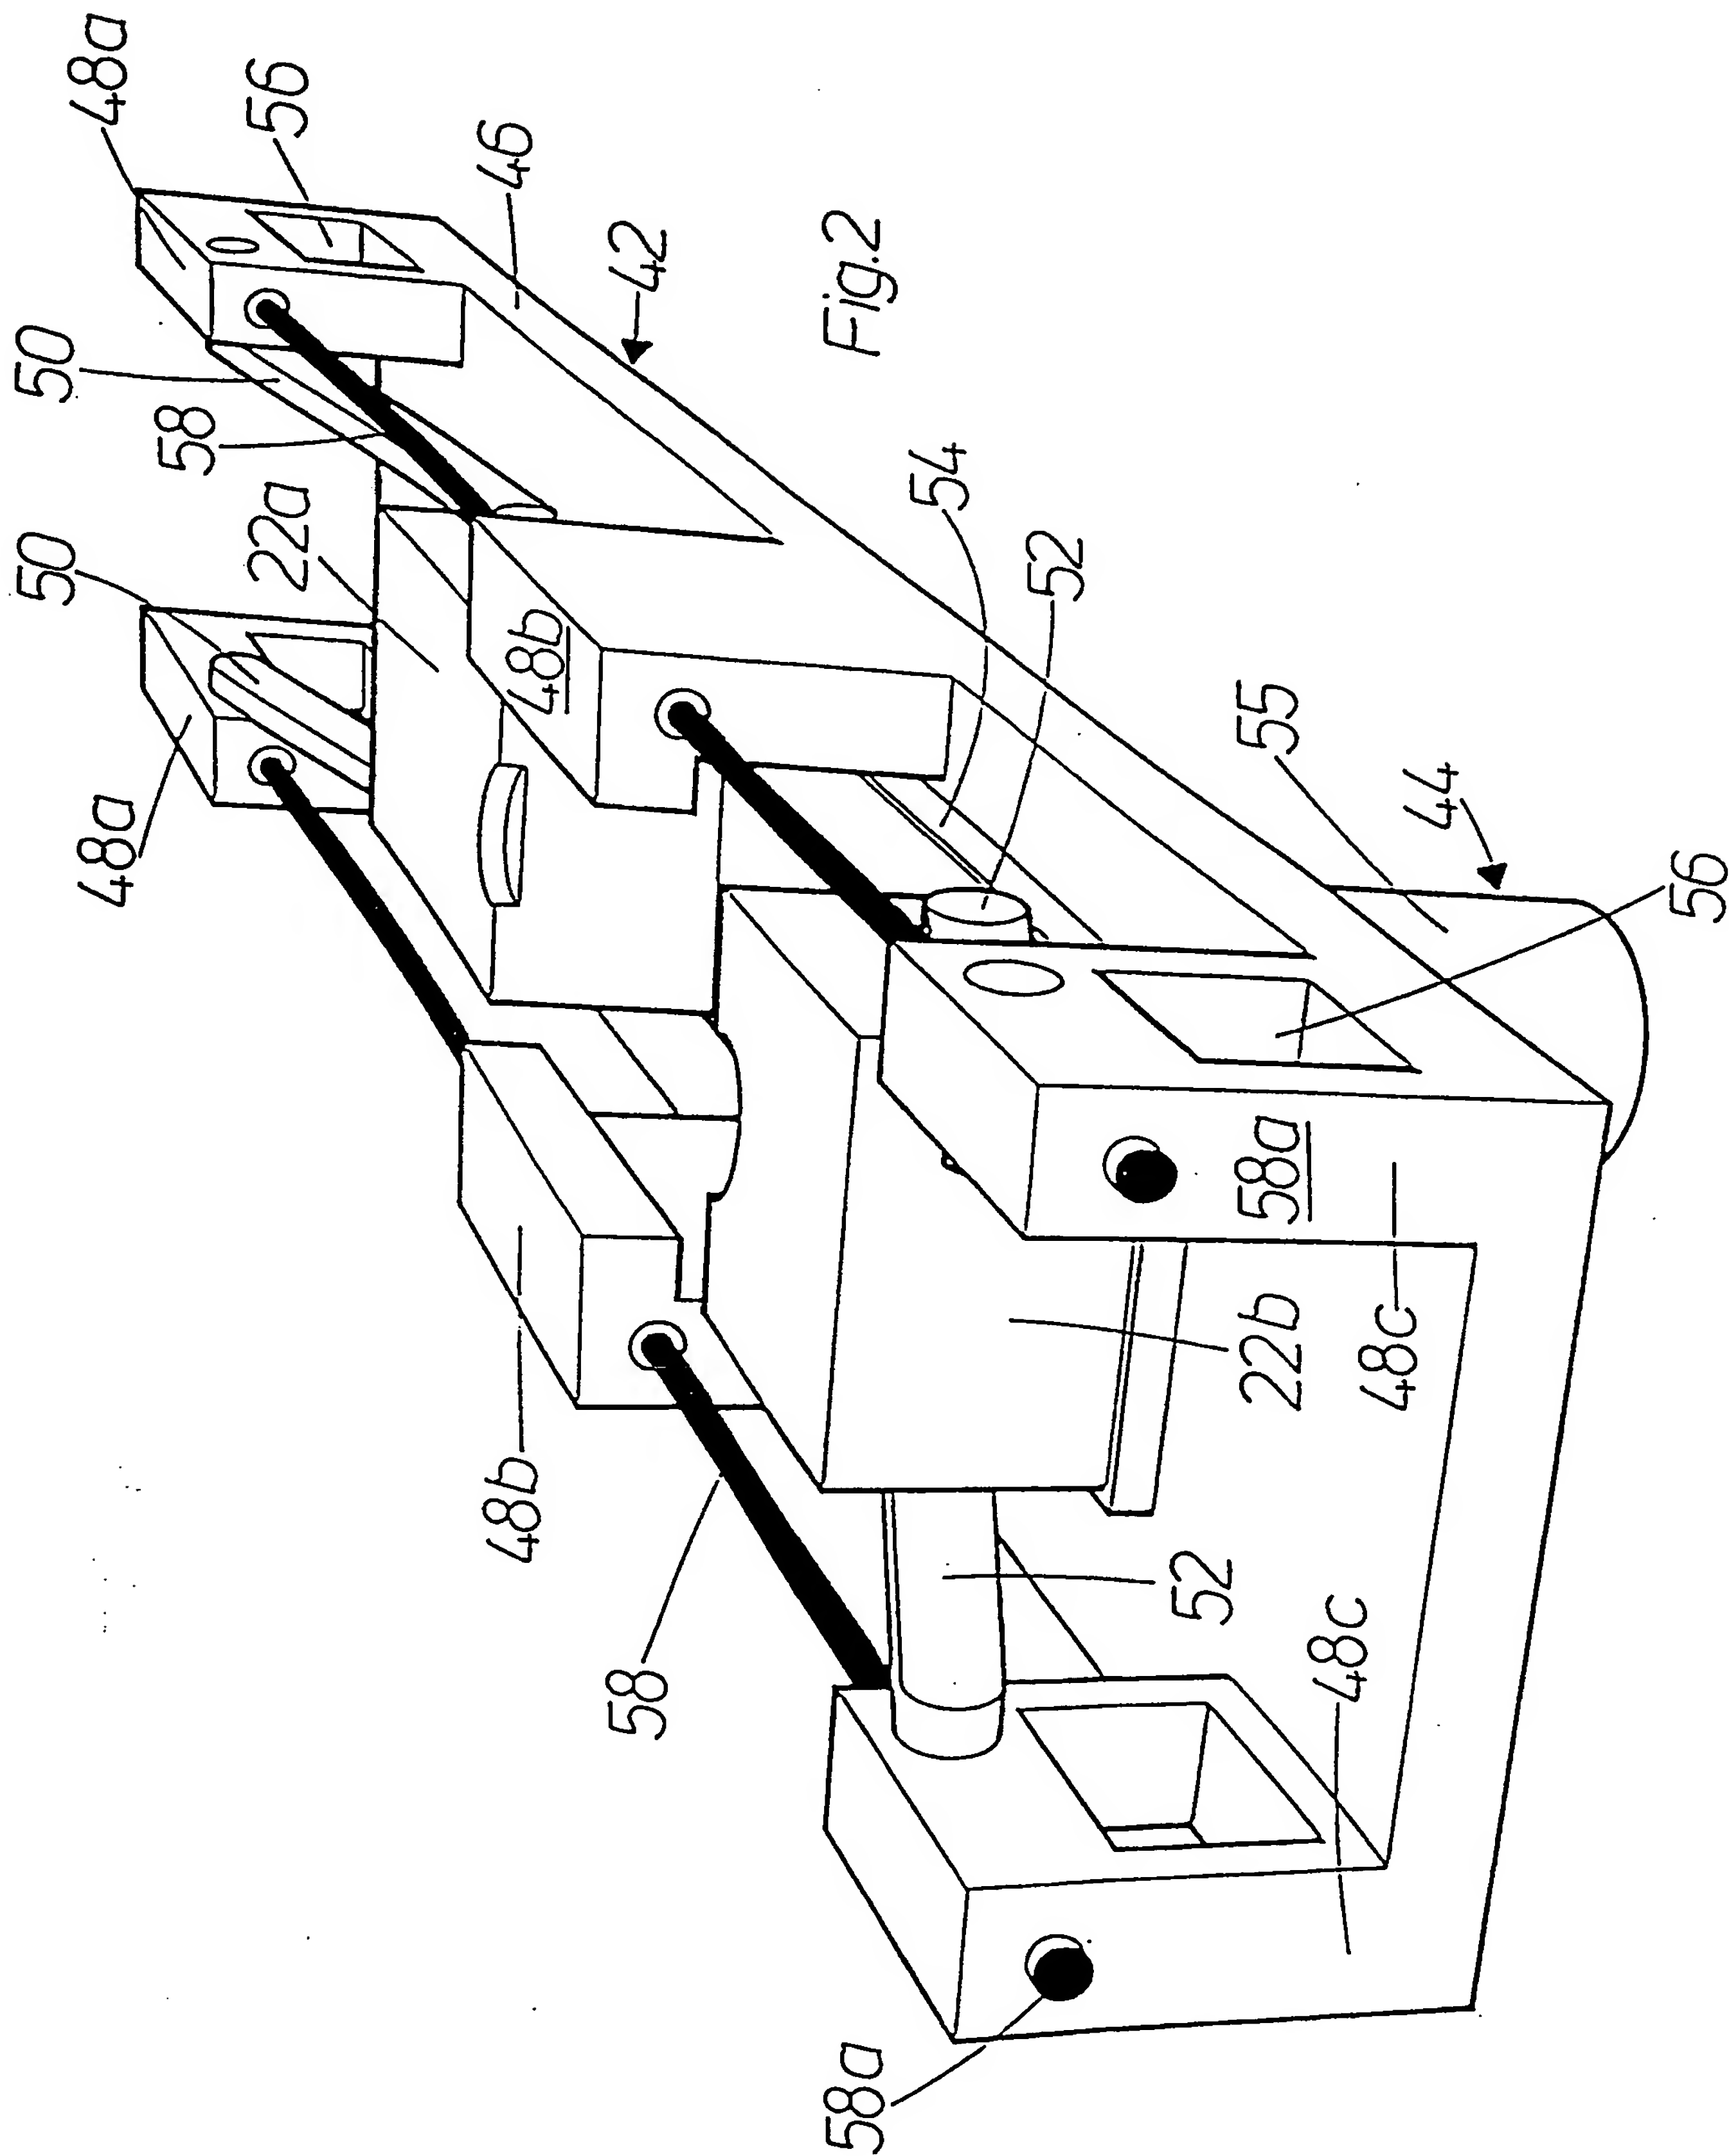
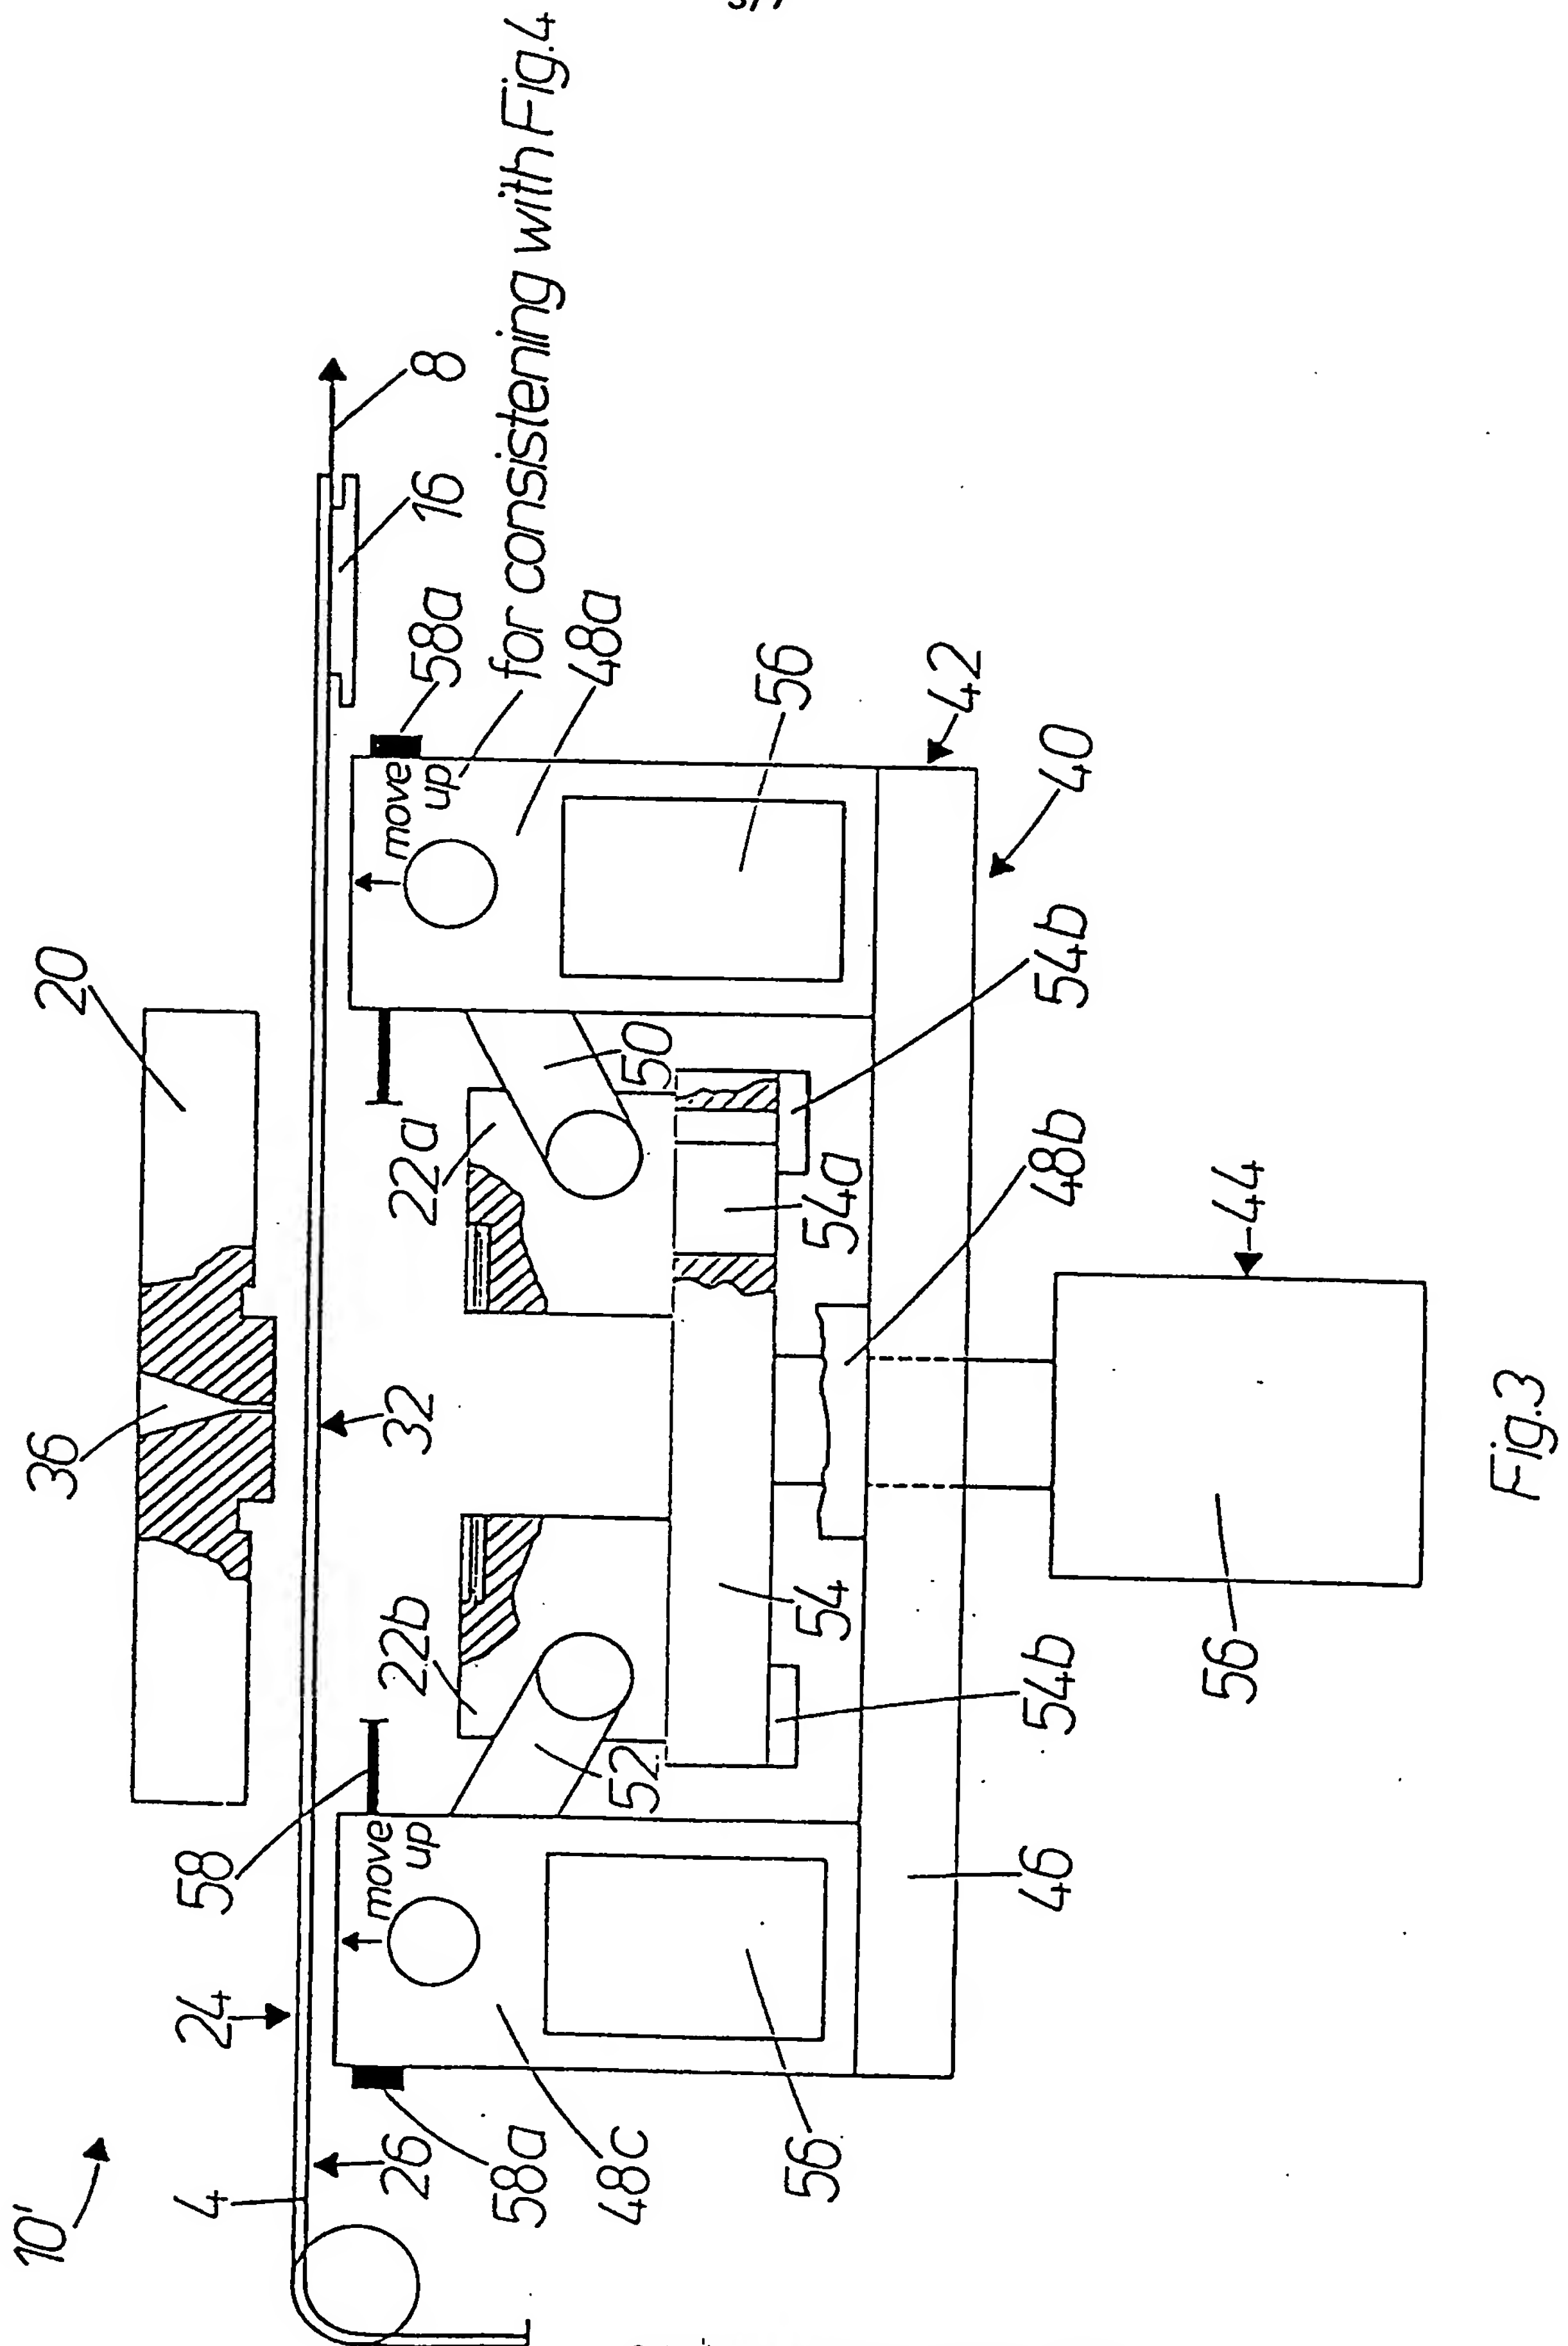


Fig.1







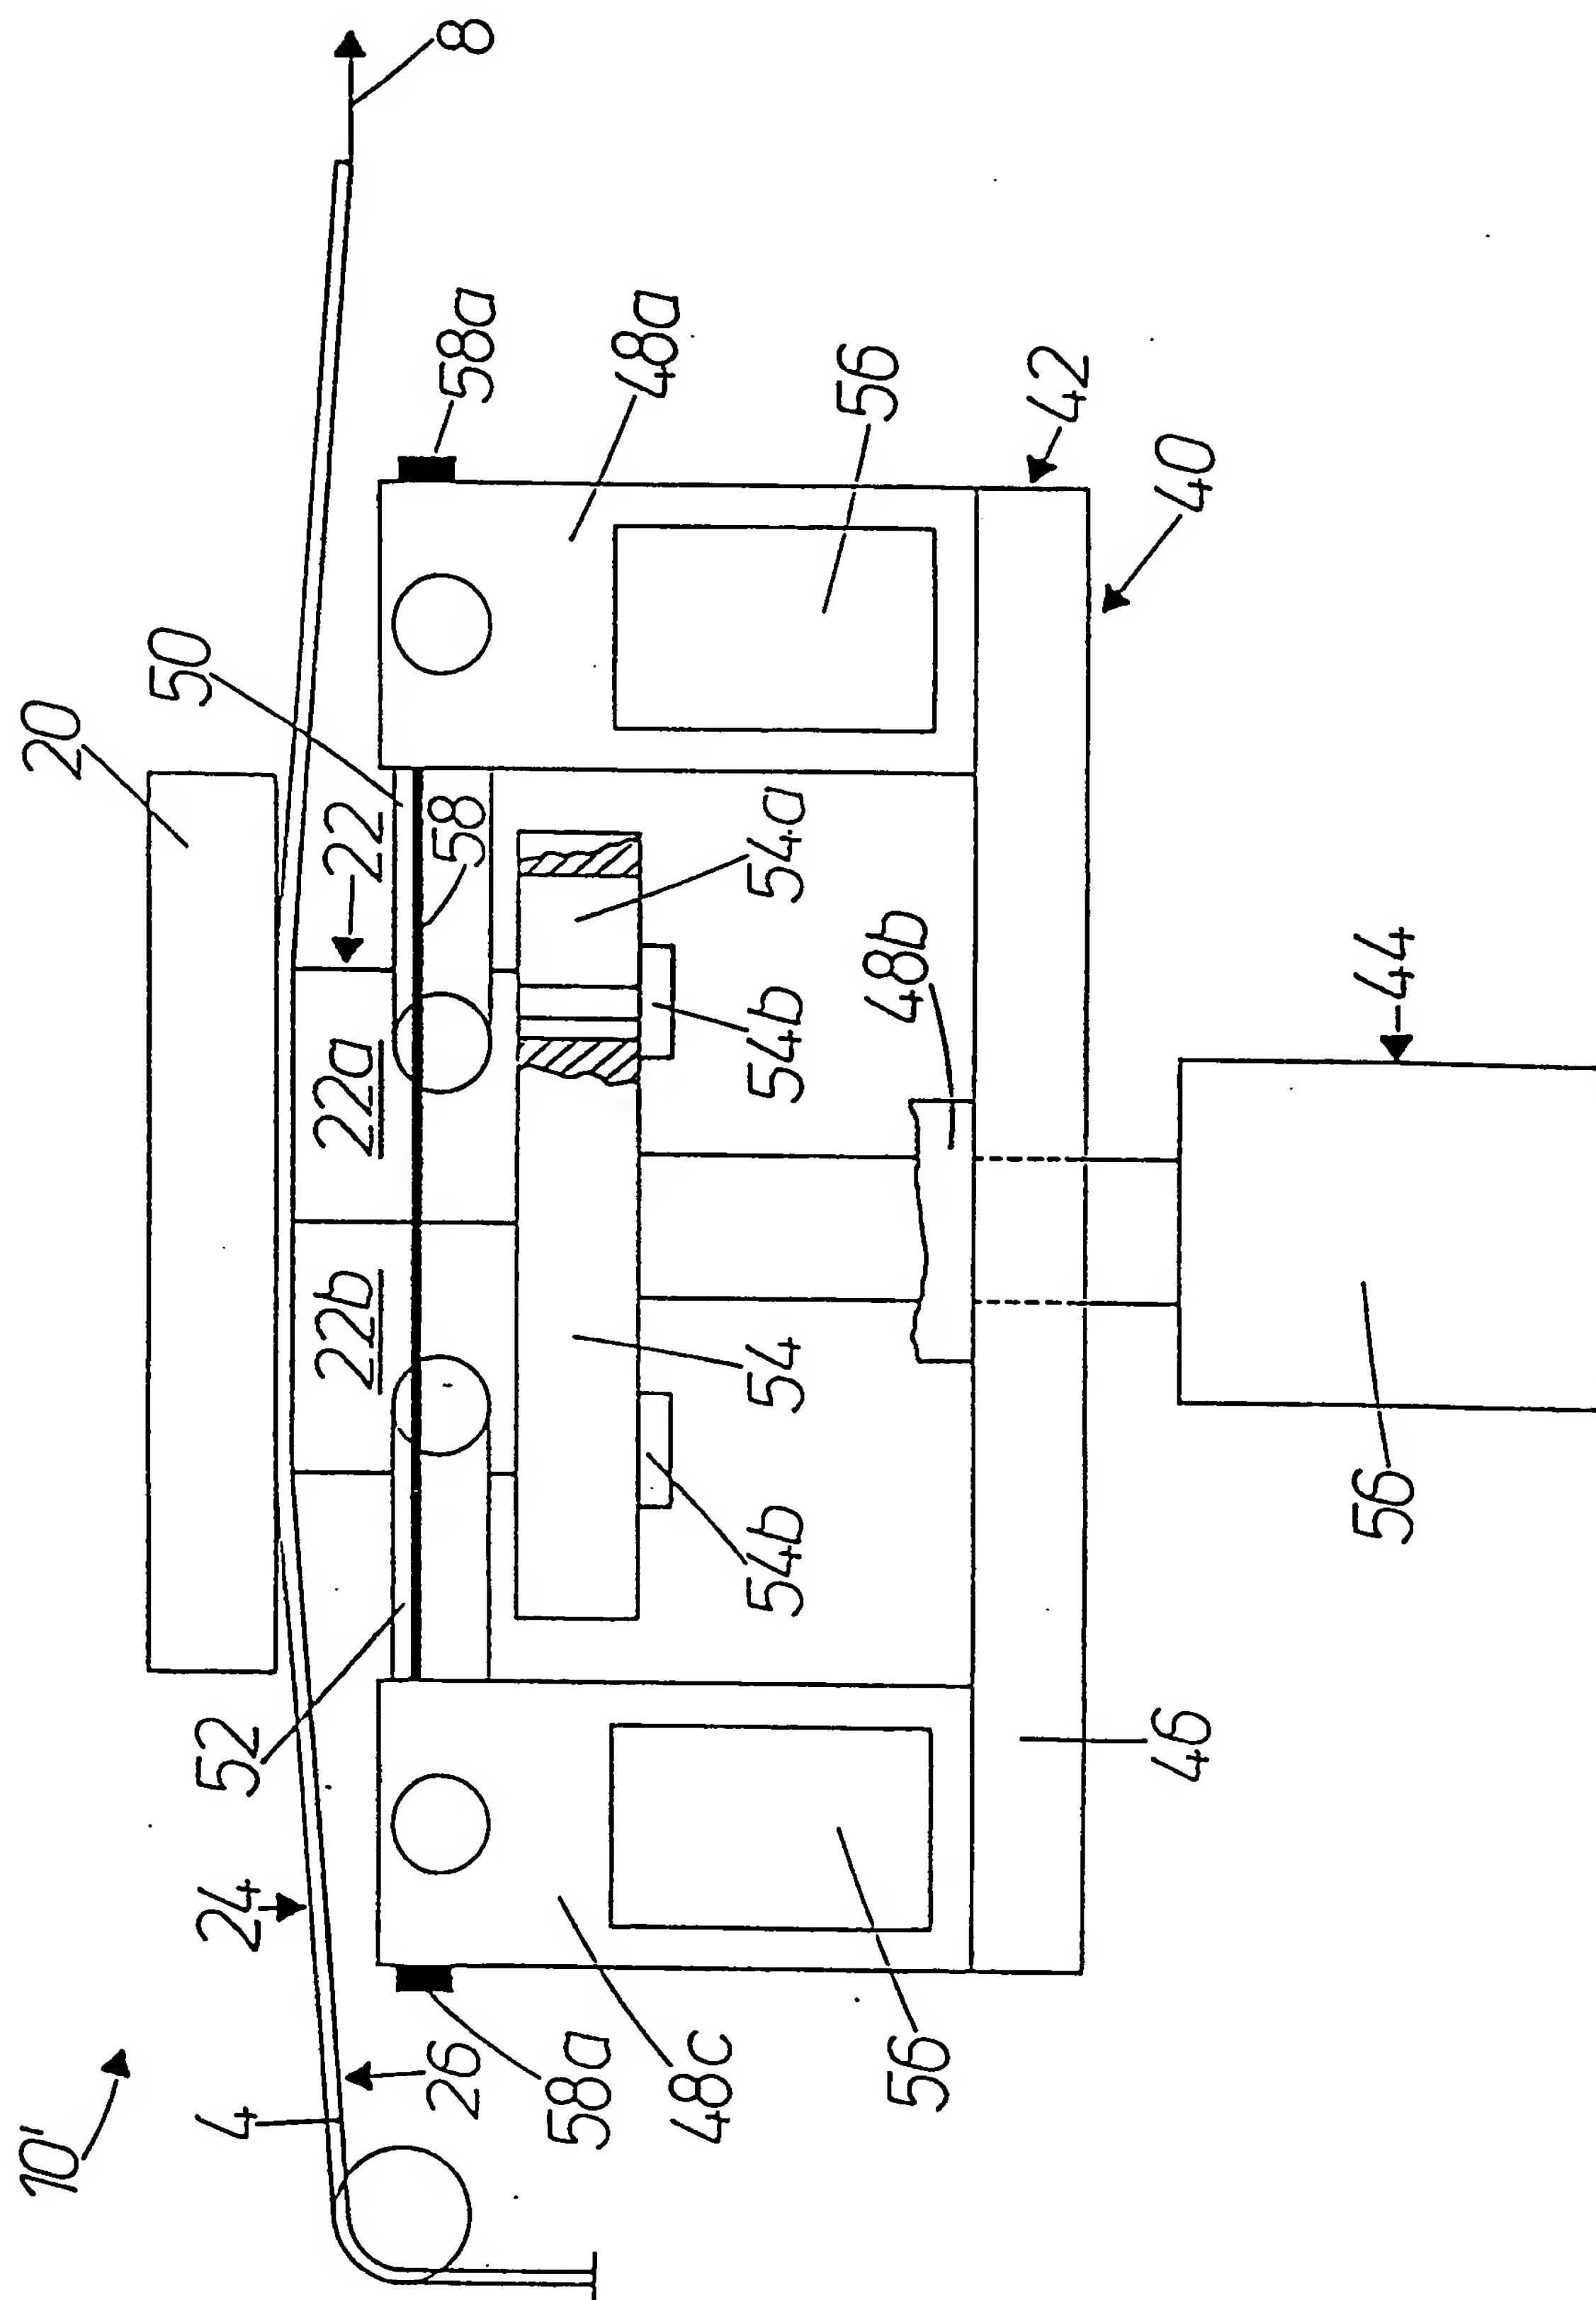


Fig. 4

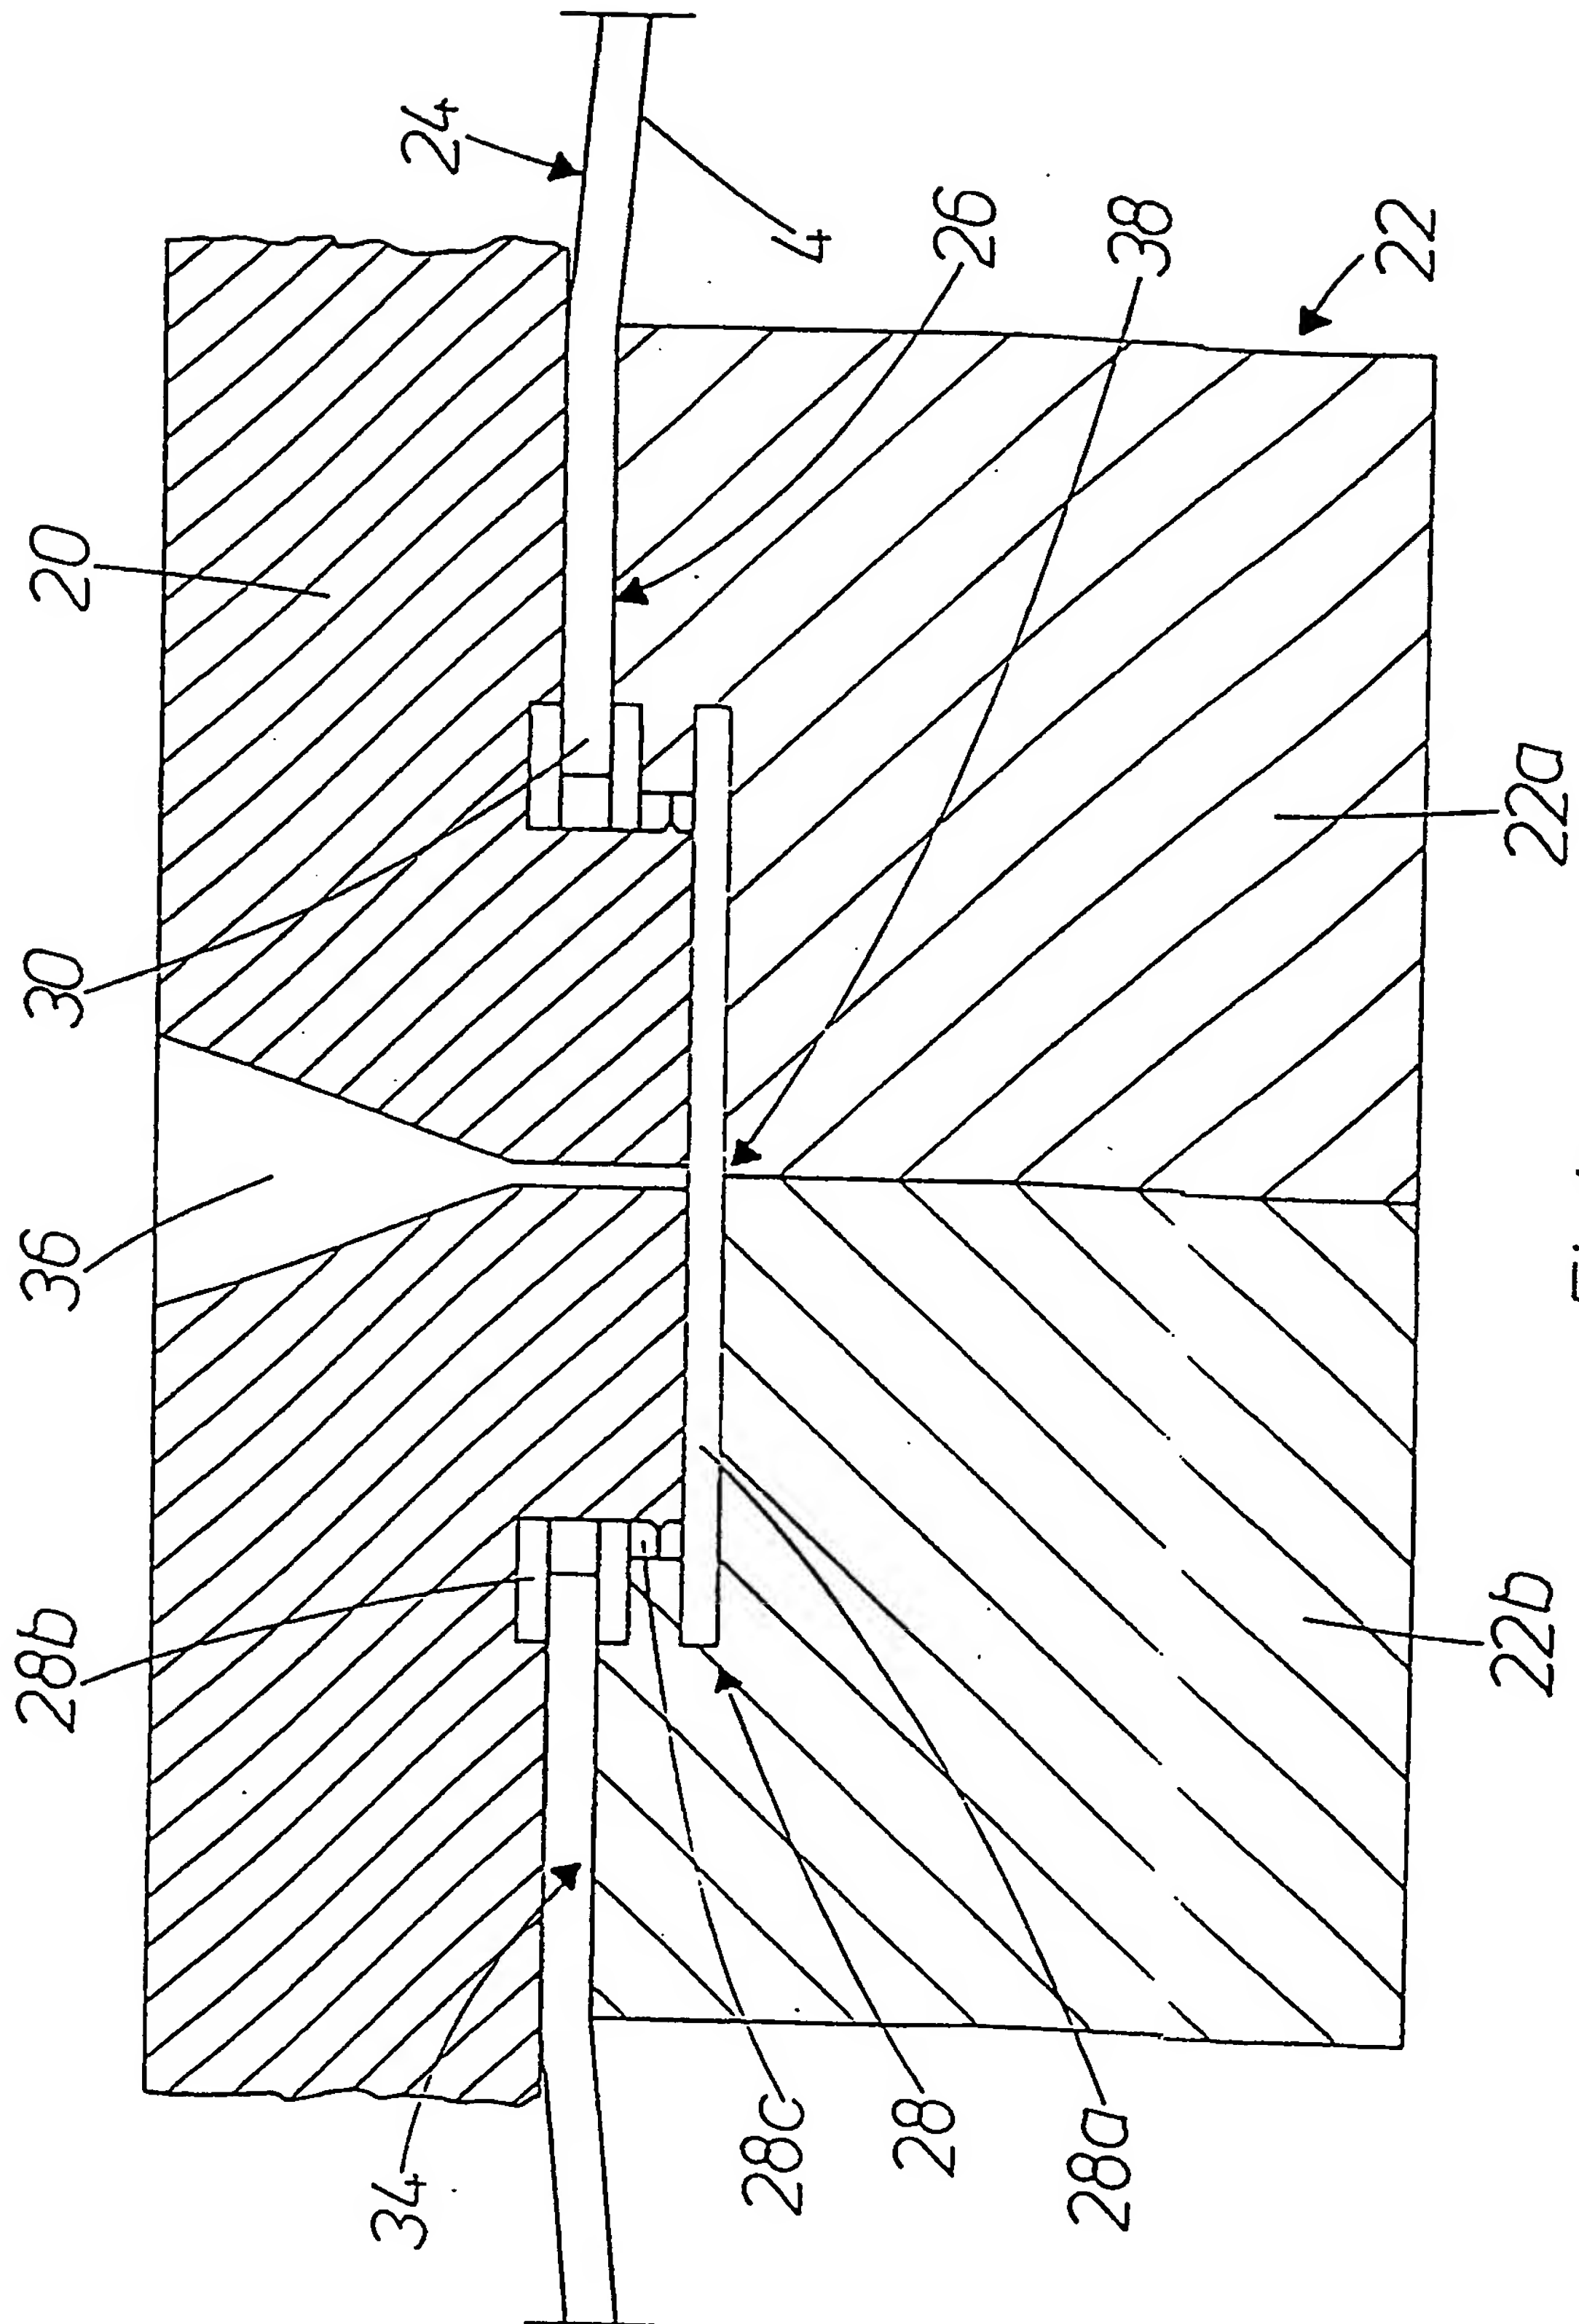


Fig.4a

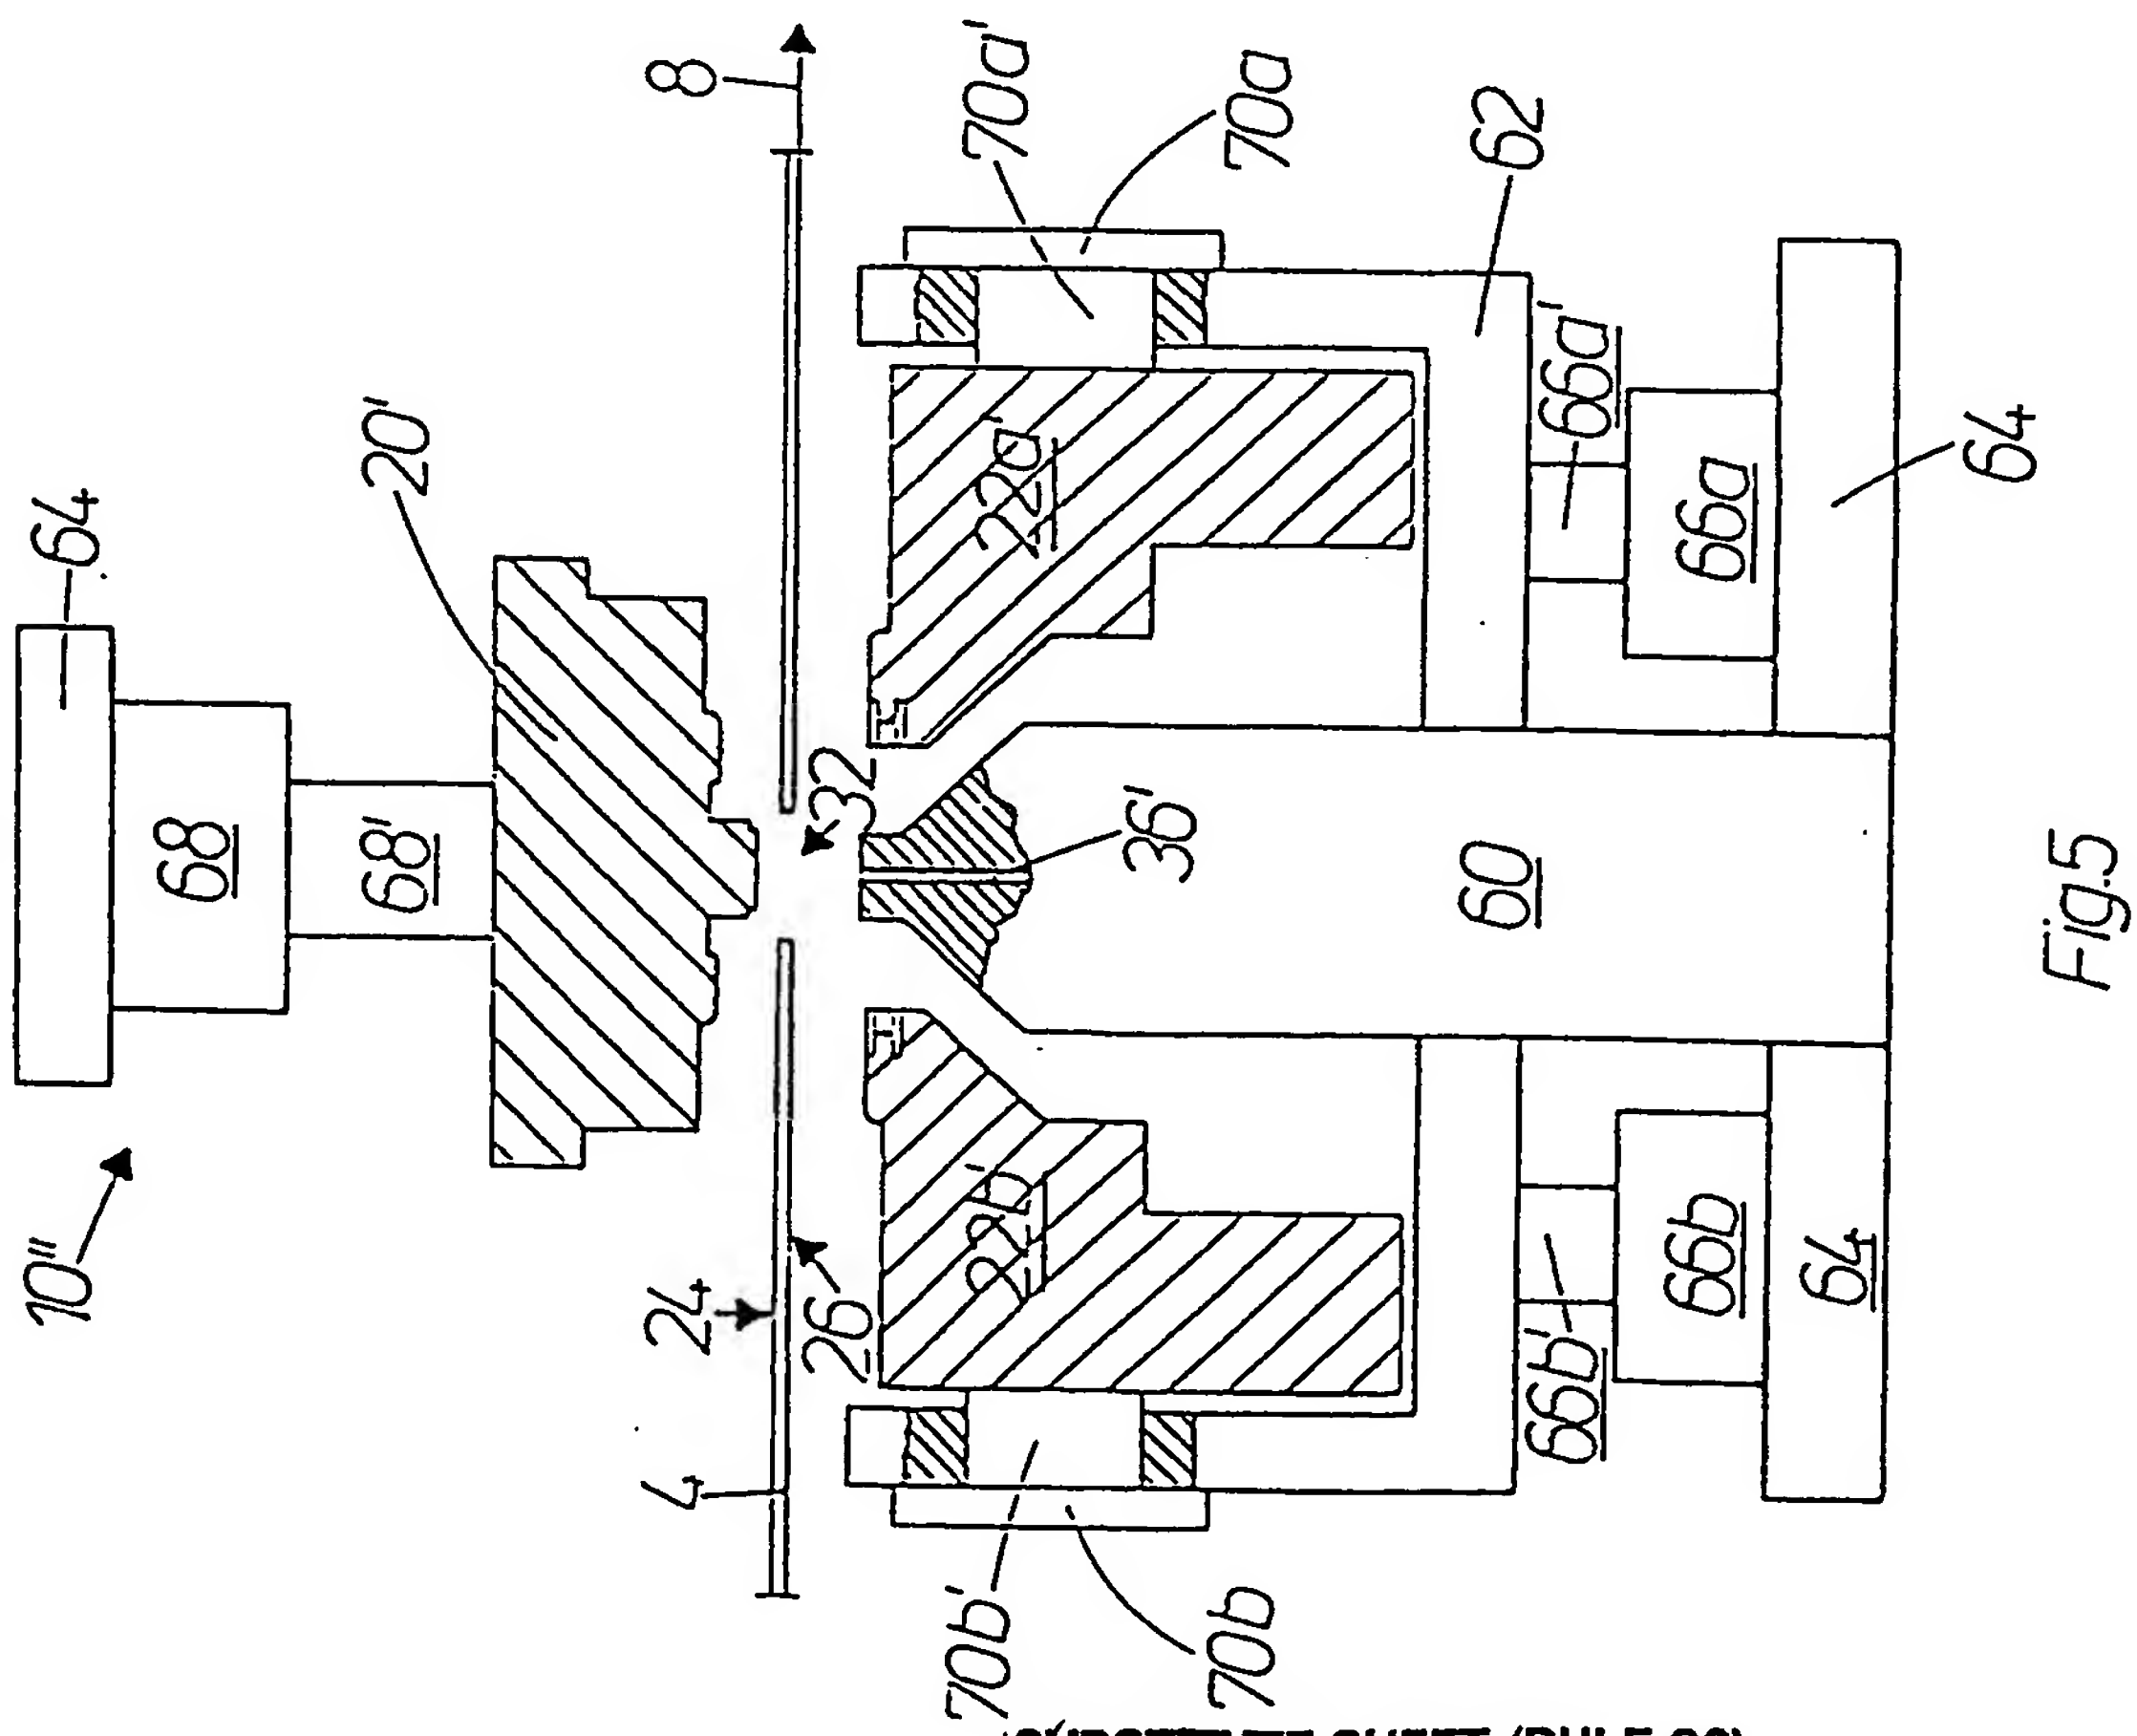


Fig 5

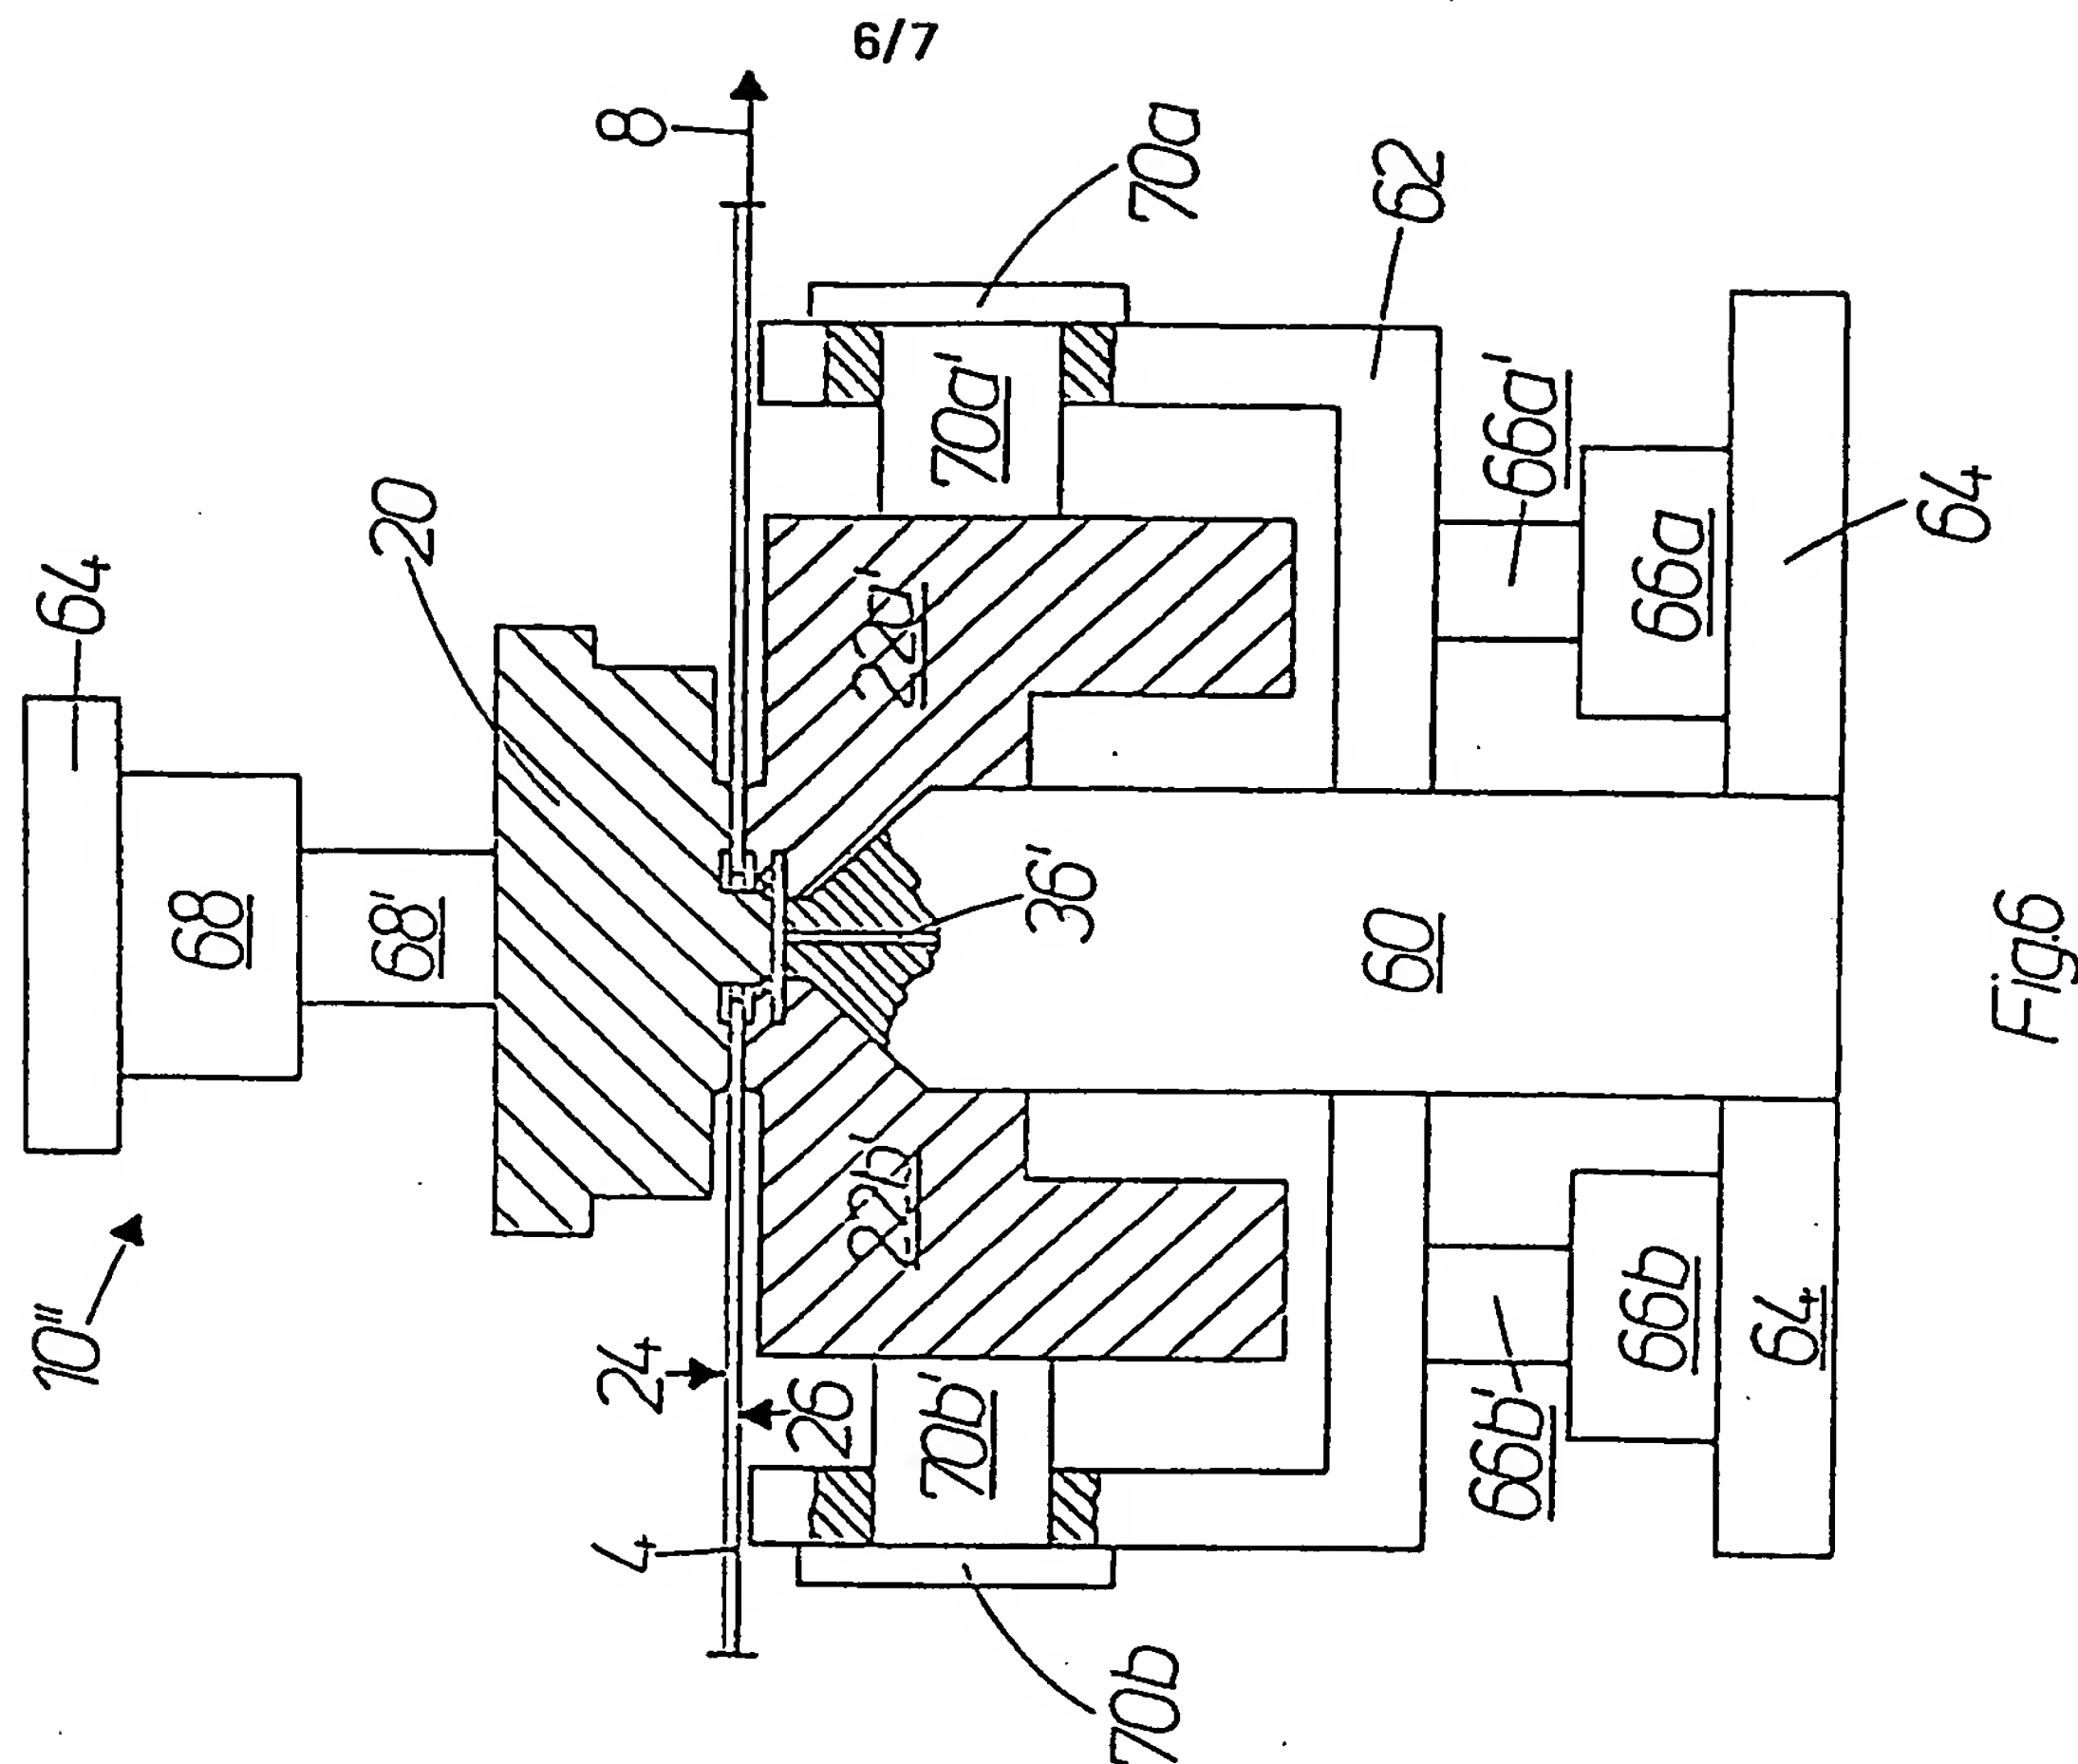


Fig 6

7/7

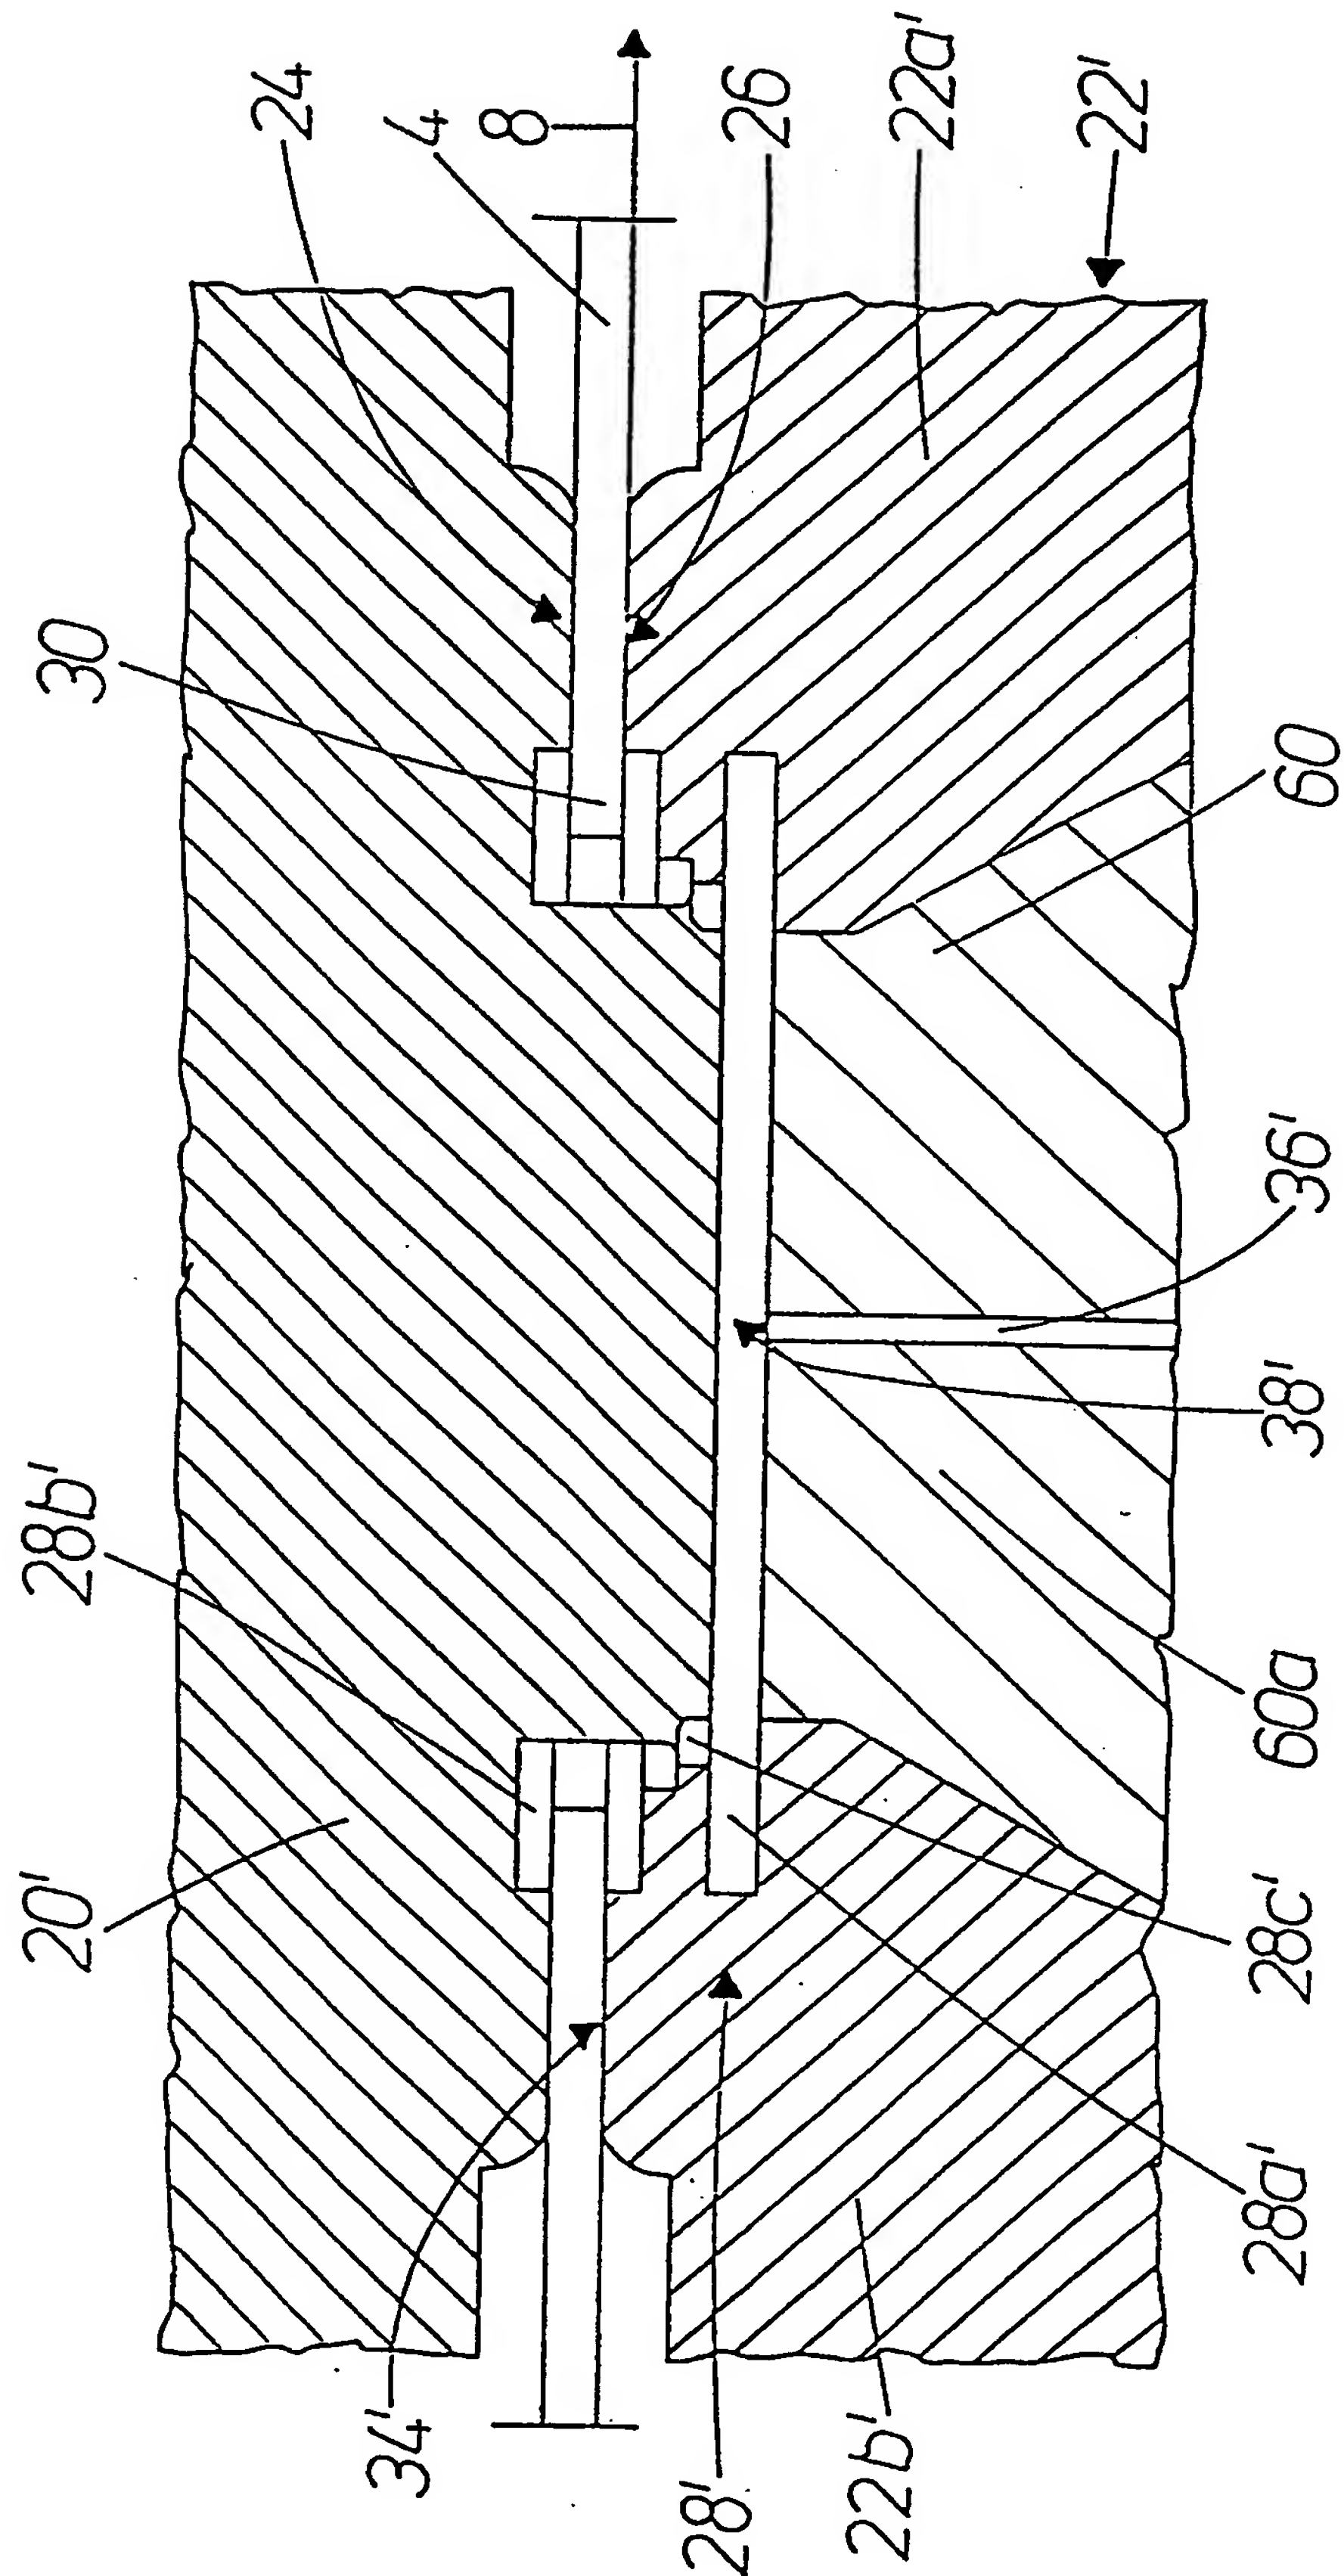


Fig.6a



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01594

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B29C 45/14, B29C 45/33

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                      | Relevant to claim No. |
|-----------|---|-----------------------|
| X         | GB 1023886 A (METAL CONTAINERS LIMITED),<br>30 March 1966 (30.03.66), page 2, line 98 - page 3,<br>line 14, figure 1    | 1-4,9-14              |
| Y         |   | 5                     |
| A         | --  | 6-8                   |
| Y         | EP 0370142 A1 (SANKYO ENGINEERING CO. LTD.),<br>30 May 1990 (30.05.90)  | 5                     |
| A         | GB 659191 A (THE METAL BOX COMPANY LIMITED),<br>17 October 1951 (17.10.51), page 3,<br>line 107 - line 130, figures 5,6 | 1-14                  |
|           | --<br>-----   |                       |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 January 1998

Date of mailing of the international search report

29 -01- 1998

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Maria Börlin  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

07/01/98

International application No.

PCT/SE 97/01594

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                  | Publication<br>date              |
|---|---------------------|---|----------------------------------|
| GB 1023886 A                              | 30/03/66            | NONE  |                                  |
| EP 0370142 A1                             | 30/05/90            | AU 606482 B<br>AU 2577388 A<br>US 4889480 A | 07/02/91<br>19/07/90<br>26/12/89 |
| GB 659191 A                               | 17/10/51            | NONE  |                                  |